



Common User Data

Machine Name: Xerox VersaLink C415 Color MFP (46:6...
IPv4 Address:
Machine Serial Number: 5334205608
Fax Line 1:
Machine URL:
Machine Activation Date: Jul 17, 2025 17:05:07
Lock Impressions: 4895
Color Impressions: 4519
Total Impressions: 9414

Machine Profile

Asset Tag:
Customer Asset Tag:
Service Phone Number:
Customer Support Number:
Supplies Phone Number:
System Administrator: Not set
Machine Location: machine location not set

Managed By

Primary MIB Server:

Machine Hardware

Fax Card: Not Present
Fax Memory Size: 0 MB
Fax Interface Card: not present
Device RAM Size: 1984 MB
Device Storage Size: used: 3085MB/total:0MB (eMMC)
PC Memory Size: 187 MB
Productivity Kit: Not Installed
Finisher Type: Simple Catch Tray
Finisher Punch: None
Finisher Folder: not present
Multi-feed Detection Kit: Not Installed

Network Setup

Remote Services: Enabled
Remote Software Download: Enabled
Remote Services Trans. Time: 14:19
Xerox Workplace Cloud: Enabled
E-mail Alerts: Disabled
Service Plan: Neutral
Geographic Region: unknown
Startup Config Report: Enabled
SMT Offset: +05:30
Cloning Installation: Allowed (Encrypted Files Only)
Allow Print Submission of Clone Files: Enabled
File Sharing: Enabled
JBIG2: Lossless

Energy Saver

Deep Sleep: Enabled
Energy Saver Mode: Job Activated
Sleep Mode Timer: 120 minutes
Auto-Off: Disabled

Software Versions

Device Software: 122.028.025.19730
Patch Version: None
Network Controller: 122.028.19730
UI Panel Firmware: 6.2
User Interface: 122.028.19730
Marking Engine: 230.332
Copy Controller: 122.028.19730
Document Feeder: 230.332
Finisher: 000.000.000
Fax: 000.000.000
OS: 230.332
Scanner: 230.332
Software Upgrade: 005.016
ALTBOT Software Upgrade: 005.016

Machine Upgrades

Last Successful Upgrade: July 21, 2025 12:19:28
Scheduled Auto Upgrades: Disabled
Auto Upgrade Start Time: Daily
Auto Upgrade Server: 0.0.0.21

Media Trays

Tray 1: Plain, White and Letter (8.5 x 11")
Manual Feeder: Plain, White and Letter (8.5 x 11")

Connectivity

Mobile Workflows

AirPrint Printing: Enabled
Mopria Printing: Enabled
AirPrint / Mopria Scanning Authentication Required: Disabled
Universal Print: Disabled
Universal Print Registration Status: Not Registered

Physical Connections

USB Settings
USB Type A Ports: All Enabled
USB Type B Port: Disabled
Wired:
Ethernet MAC Address: Enabled
Ethernet Speed/Duplex Setting: 78:8c:77:46:60:59 auto

Wireless

Wireless MAC Address: Disabled
Network Name (SSID):
BSSID:
Security Mode:
Encryption Algorithm:
Status:

Wi-Fi Direct

Wireless Hardware: Enabled
Wi-Fi Protected Setup (WPS) Name: Not Installed
Connection Method:
Subnet Prefix Address:
Access Point (SSID):
Show Password on Device Touch Screen:

NFC

iBeacon (Bluetooth®) for AirPrint Di...: Enabled
iBeacon Hardware: Enabled
Bluetooth Device Address: Not Installed
iBeacon IP Address:

Protocols

TCP/IPV4:

IPv4 Address: Disabled
Subnet Mask: 255.255.255.0
Router/Gateway: 10.61.16.1
Automatic Addressing: DHCP
DHCP Server:
DHCP Lease Expiration:
BOOTP Broadcast: Disabled
Self Assigned Address State: Enabled
Self Assigned Address:

TCP/IPV6:

Link Local Address: Enabled
Use Router Supplied Prefix: fe80::7a8c:77ff:fe46:6059
Stateless Global Address 1: Enabled
Stateless Global Address 2:
Manual Address: 2403:022b:48af8:484f666e:36a
DHCP Addressing: Use DHCP as directed by a router
DHCP Address:
Default Gateway: fe80::4e42:1eff:fe9e:7967
DUID (DHCP Unique Identifier):

DNS Settings:

Requested Host Name: XRX788C77466059
Verified Host Name:
Requested Domain Name:
Verified Domain Name:
Multicast DNS: Enabled
Release DHCP Leases and DNS Registrati...: Disabled
Primary DNS Server:
Alternate DNS Server 1:
Alternate DNS Server 2:
DNS Connection Timeout: 5
Append Device Domain: Enabled
Append Parent Domains: Disabled
DNS Domain Search List:
Prefer IPv6 DNS over IPv4: Enabled

Installed Options

PS: Installed

Protocols (cont.)

Bonjour:
 Bonjour Printer Name: Xerox VersaLink C415 Color MFP (46:6...
 HTTP: Enabled
 Port Number: 80
 Force Traffic over Secure Connection (H...: Yes
 Secure HTTP Port Number: 443
 Proxy Server: Disabled
 Proxy Server Address: 0.0.0.0:8080
 IPP: Enabled
 Secure IPP Mode: IPP and Secure IPPS
 IPP Network Path: http://631

SNMP
 SNMP v1/v2: Enabled
 SNMP v3: Disabled

LPR/LPD:
 Port Number: 515
 PDL Switching: Disabled
 PDL Banner Override: Disabled

Raw IP Printing:
 Port Number 1: 9100
 Bidirectional: Disabled
 End of Job Timeout: 300
 PDL Switching: Disabled

LDAP
 LDAP Server 1 Friendly Name:
 LDAP Server 1 Primary LDAP Address: 0.0.0.0:389
 LDAP Server 1 Alternate LDAP Address: 0.0.0.0:389
 LDAP Server 1 Search Directory Root:
 LDAP Server 1 Secure Connection (LDA...: Disabled
 LDAP Server 1 Validate Server Certificate...: Disabled

SMTP
 SMTP Server: 0.0.0.0:25
 Connect Encryption (TLS): No Encryption
 Validate Server Certificate (TLS):
 Max Message Size (KB): 10240
 Number of Fragments: 1
 Total Job Size (KB): 300000
 Job Splitting Boundary: Page Boundary
 Credentials for Auto E-mails: None
 Credentials for Walkup User: None
 SMTP Authentication Type: Basic Auth with SMTP

POP3
 POP3 Server: 0.0.0.0:110
 POP3 Secure Connection (TLS): Disabled
 E-mail Address:
 POP3 Validate Server Certificate:
 Receipt of E-mail via POP3: Disabled
 Send Confirm on Request: Enabled
 Incoming E-mail cover sheet: Enabled

NTF:
 Primary Server: Disabled
 Alternate Server: 0.0.0.0:123

SLP:
 0.0.0.0:123

FTP Client:
 FTP Client Mode: Enabled
 Web Services on Device: Passive

Web Services:
 WS-Discovery: Enabled
 WS-Discovery Multicast: Enabled
 WS-Print: Enabled
 WS-Scan: Enabled

Web Services
 Copy Submission: Enabled
 Digital Certificate Management and Securi...: Enabled
 Extensible Service Registration: Enabled
 Job Limits: Enabled
 Job Management Extension: Enabled
 Device Configuration: Enabled
 Scan Submission: Enabled
 Scan Workflow Management: Enabled
 Session Data: Enabled
 User Interface Configuration: Enabled
 EIP Proxy Configuration: Enabled
 Xerox Secure Access: Disabled
 EIP SNMP Configuration: Enabled
 Print Submission: Enabled
 Scan Template Mgmt: Enabled
 Mass Storage Access: Enabled
 Card Reader Access: Enabled
 Authentication & Accounting Configur...: Enabled
 Export Audit Log: Enabled
 Trellix Embedded Control: Enabled

Apps

Printing

Banner Sheet:
 Enabled
 Sys/Start Job: Disabled
 Delete Held Jobs After: 3 Day(s) 0 Hour(s) 0 Minute(s)
 Error Sheets: Enabled
 Paper Substitution: Enabled
 Tray Priority: 1.5
 Default Copies: 1
 Default Job Type: Normal Print
 Default Paper Size: x=8.50 inches, y=11.00 inches
 Default Paper Color: White
 Default 2 Sided Printing: 2 Sided
 Default Output Tray: Center Tray
 Default Output Color: Color
 Default Collated Sets: Enabled
 Default Stapling: Not Available
 Offsetting Between Jobs: No Offset Between Jobs
 Archival Marking Mode: Off
 PostScript Level: Installed
 Version: 3
 Image Quality: 3021.101 Enhanced

PCL
 Version: 6
 Pitch Size: 10.00
 Point Size: 12.00
 Font Name: Courier
 Lines Per Page: 60
 Custom Color Tables: Enabled
 Label: Not Installed

Fax:
 Fax Line1: Not Present
 Fax Line2: Not Present

Server Fax:
 Confirmation Sheet: Enabled
 Delay Start: Errors Only
 Repository Protocol: Disabled
 Repository Server: SMB
 Repository Document Path: 0.0.0.0

Workflow Scanning:
 Confirmation Sheet: Enabled
 Off
 Default Repository Protocol: SMB
 Default Repository Server: exchange.gdcipv6.com:21
 Default Repository Document Path:
 Default Repository Login Credentials: Device
 Alt1 Repository Protocol: SMB
 Alt1 Repository Server: 0.0.0.0
 Alt1 Repository Document Path: Device
 Alt1 Repository Login Credentials: SMB
 Workflow Pool Protocol: SMB
 Workflow Pool Server: 0.0.0.0
 Workflow Pool Path:

Email:
 Default From Address: Enabled
 Confirmation Sheet: Errors Only
 Auto Send to Self: Disabled
 E-mail Security: Disabled

Scan to Mailbox:
 View Mailboxes by Default: Enabled
 Storage Capacity (MB): 672 MB
 Storage Used (MB): 67 MB
 Cleanup of Public Folders: Enabled
 Cleanup of Created Folders: Enabled
 Cleanup Time: Daily

Scan to Home:
 Friendly Name: Disabled
 Workflow Name: Disabled
 Auto Create Subdir: Disabled
 Append User Name to Path: Disabled
 Auto Create User Name Dir: Disabled

Scan To:
 Cloud Services: Enabled
 Disabled

Print From:
 Saved Jobs for Reprint: Enabled
 Print From USB: Enabled
 Print From MailBox: Enabled
 Cloud Services: Disabled



Accounting

Accounting Mode: None
Network Accounting: Disabled

Security

Authentication Configuration

Machine UI Authentication: Locally on the Device
Home: Unlocked
Jobs: Unlocked
Device: Unlocked
Device Website Authentication: Locally on the Device
Authentication: Locally on the Device
Retrieve E-mail from LDAP: Enabled

Authentication Server:

Kerberos Primary Realm:
Kerberos Primary Address: 0.0.0.88
Kerberos Alt 1 Realm:
Kerberos Alt 1 Address: 0.0.0.88
SMB NT Domain:
SMB Alt 1 NT Domain:
Smartcard Ctrl Server: 0.0.0.443
Smartcard Ctrl Domain:
SmartCard OCSP URL:
Card Reader Upgrade Policy: Enabled
Card Reader Firmware Version:

Xerox Secure Access:

Secure Access Server: Disabled
Secure Access Path: 0.0.0.443

Audit Log:

IP Sec: Enabled
IP Filtering: Disabled

Security Certificates

Machine Certificate: Signed
Root Certificates Installed: 53

802.1x:

Job Data Removal: Disabled


Scheduled Frequency:

FIPS 140-3: Disabled

TLS: TLS 1.2 and TLS 1.3
SHA-1, SHA-256 and above
Enhanced Security

Trellix Embedded Control:

Third Generation Browser: X3G_3.24.23_2.40.5_012_01.00.00
Widget Version: v1.3.17 e8 20140613
Widget Version: v2.5.04 g9 20240123

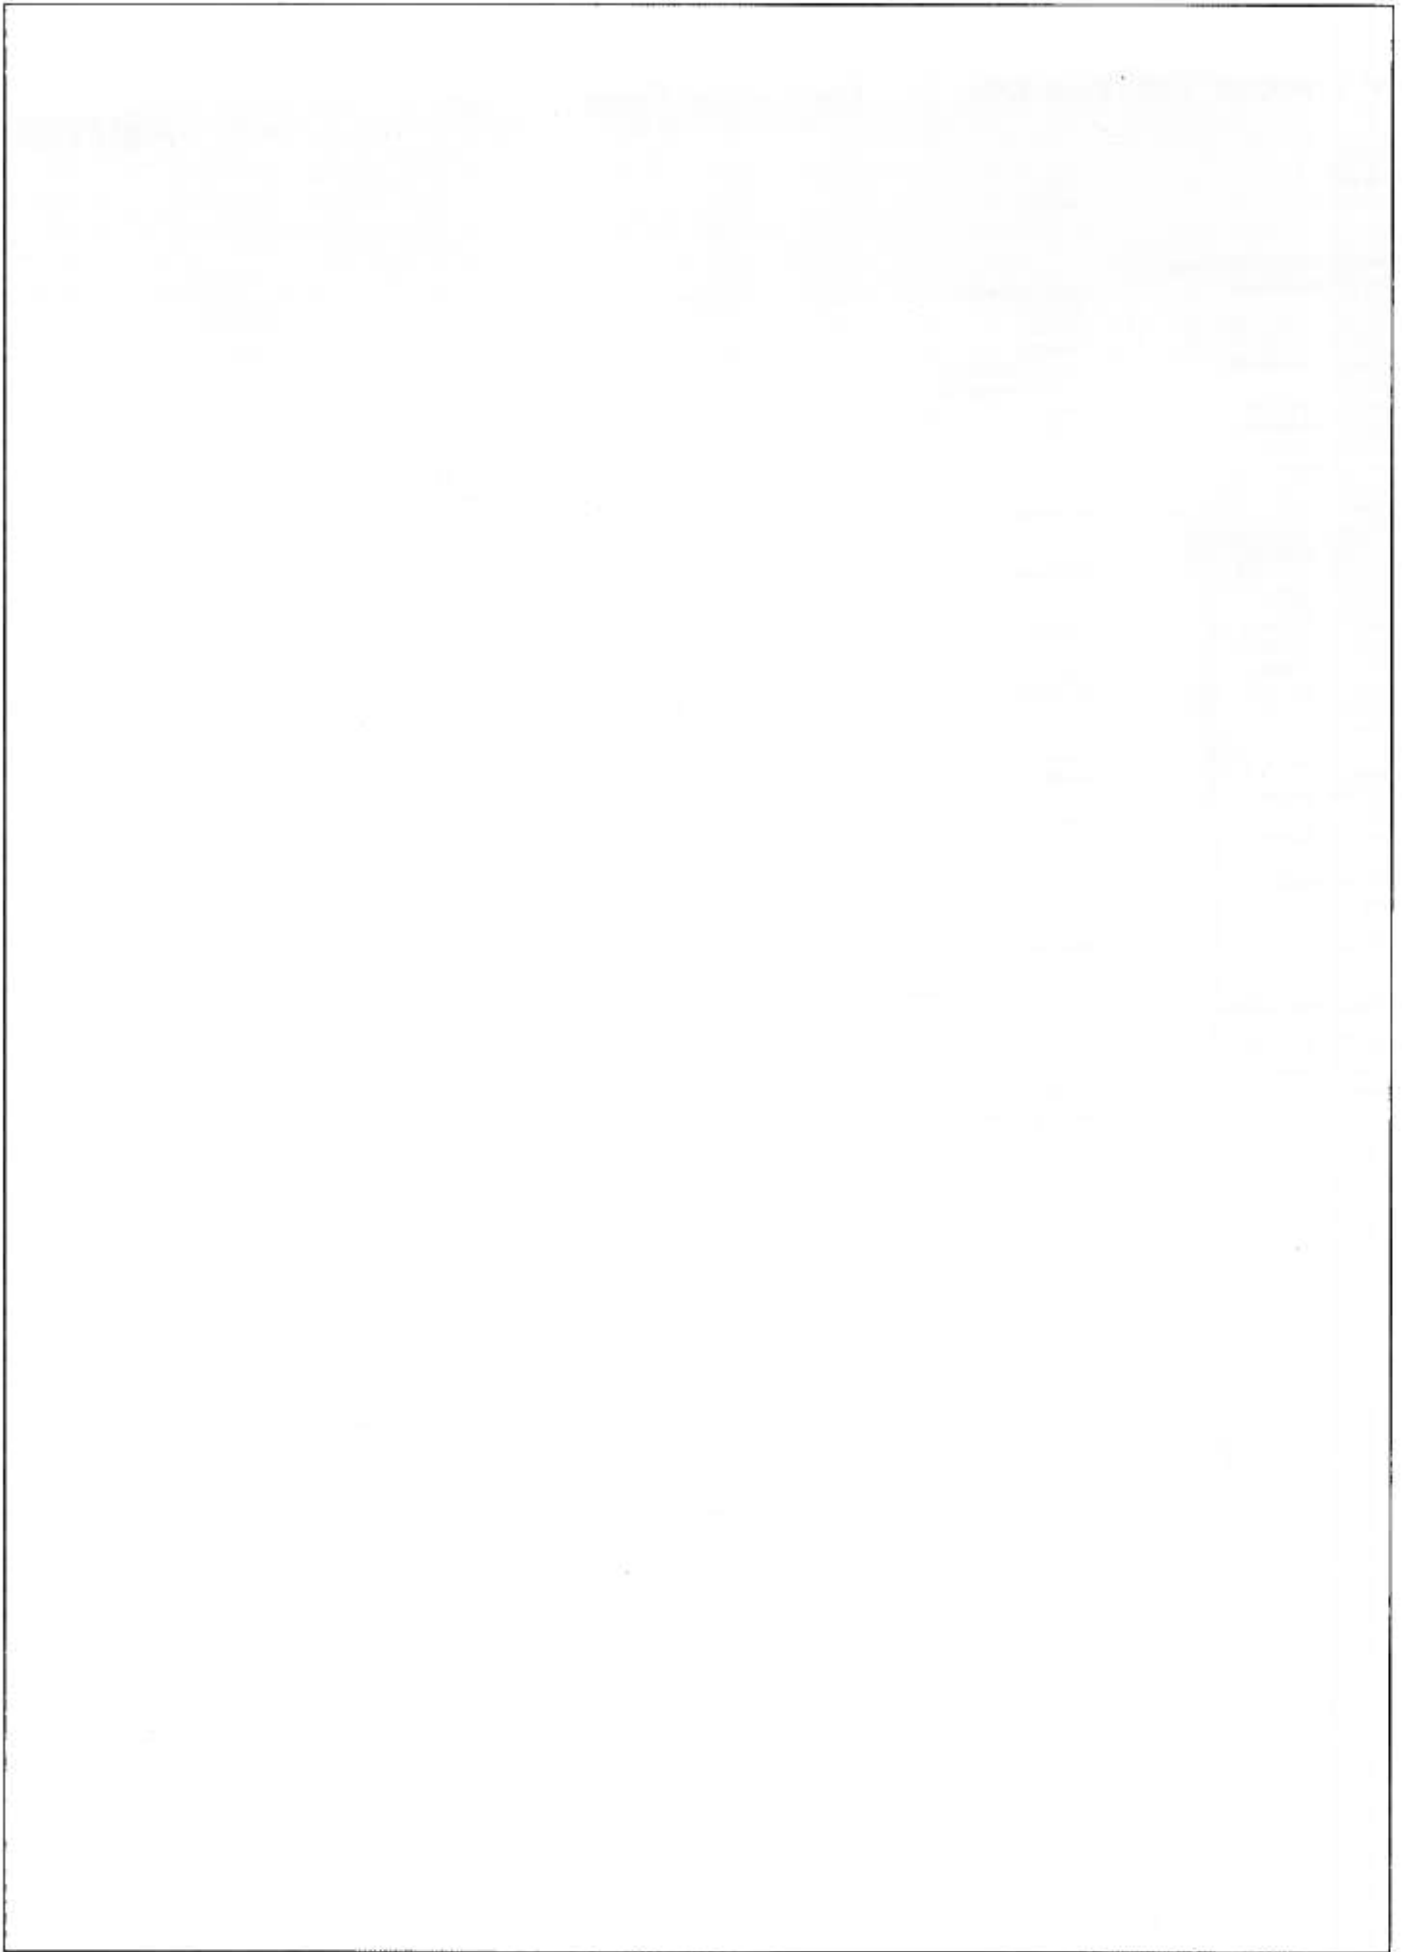

Billing Summary

System Information

Machine Name: Xerox VersaLink C415 Color MFP (46:6...
Machine Serial Number: 5334205608
Power On Impressions: 2

Software Versions

Device Software: 122.028.025.19730
Patch Version: None
Network Controller: 122.028.19730
UI Panel Firmware: 6.2
Marking Engine: 230.332
Document Feeder: 230.332
Finisher: 000.000.000
Fax: 000.000.000
Scanner: 230.332

Billing Meters

Fax

Embedded Fax Images Sent: 0
Embedded Fax Impressions: 0

Plain Paper: 2426
Bond: 10
Preprinted: 10

Copy

Black Copied Impressions: 1774
Color Copied Impressions: 2145

Print


Black Printed Impressions: 2897
Color Printed Impressions: 2371

Scan

Network Scanning Images Sent: 403
E-mail Images Sent: 0

Device Totals

Black Impressions: 4898
Color Impressions: 4521
Total Impressions: 9419

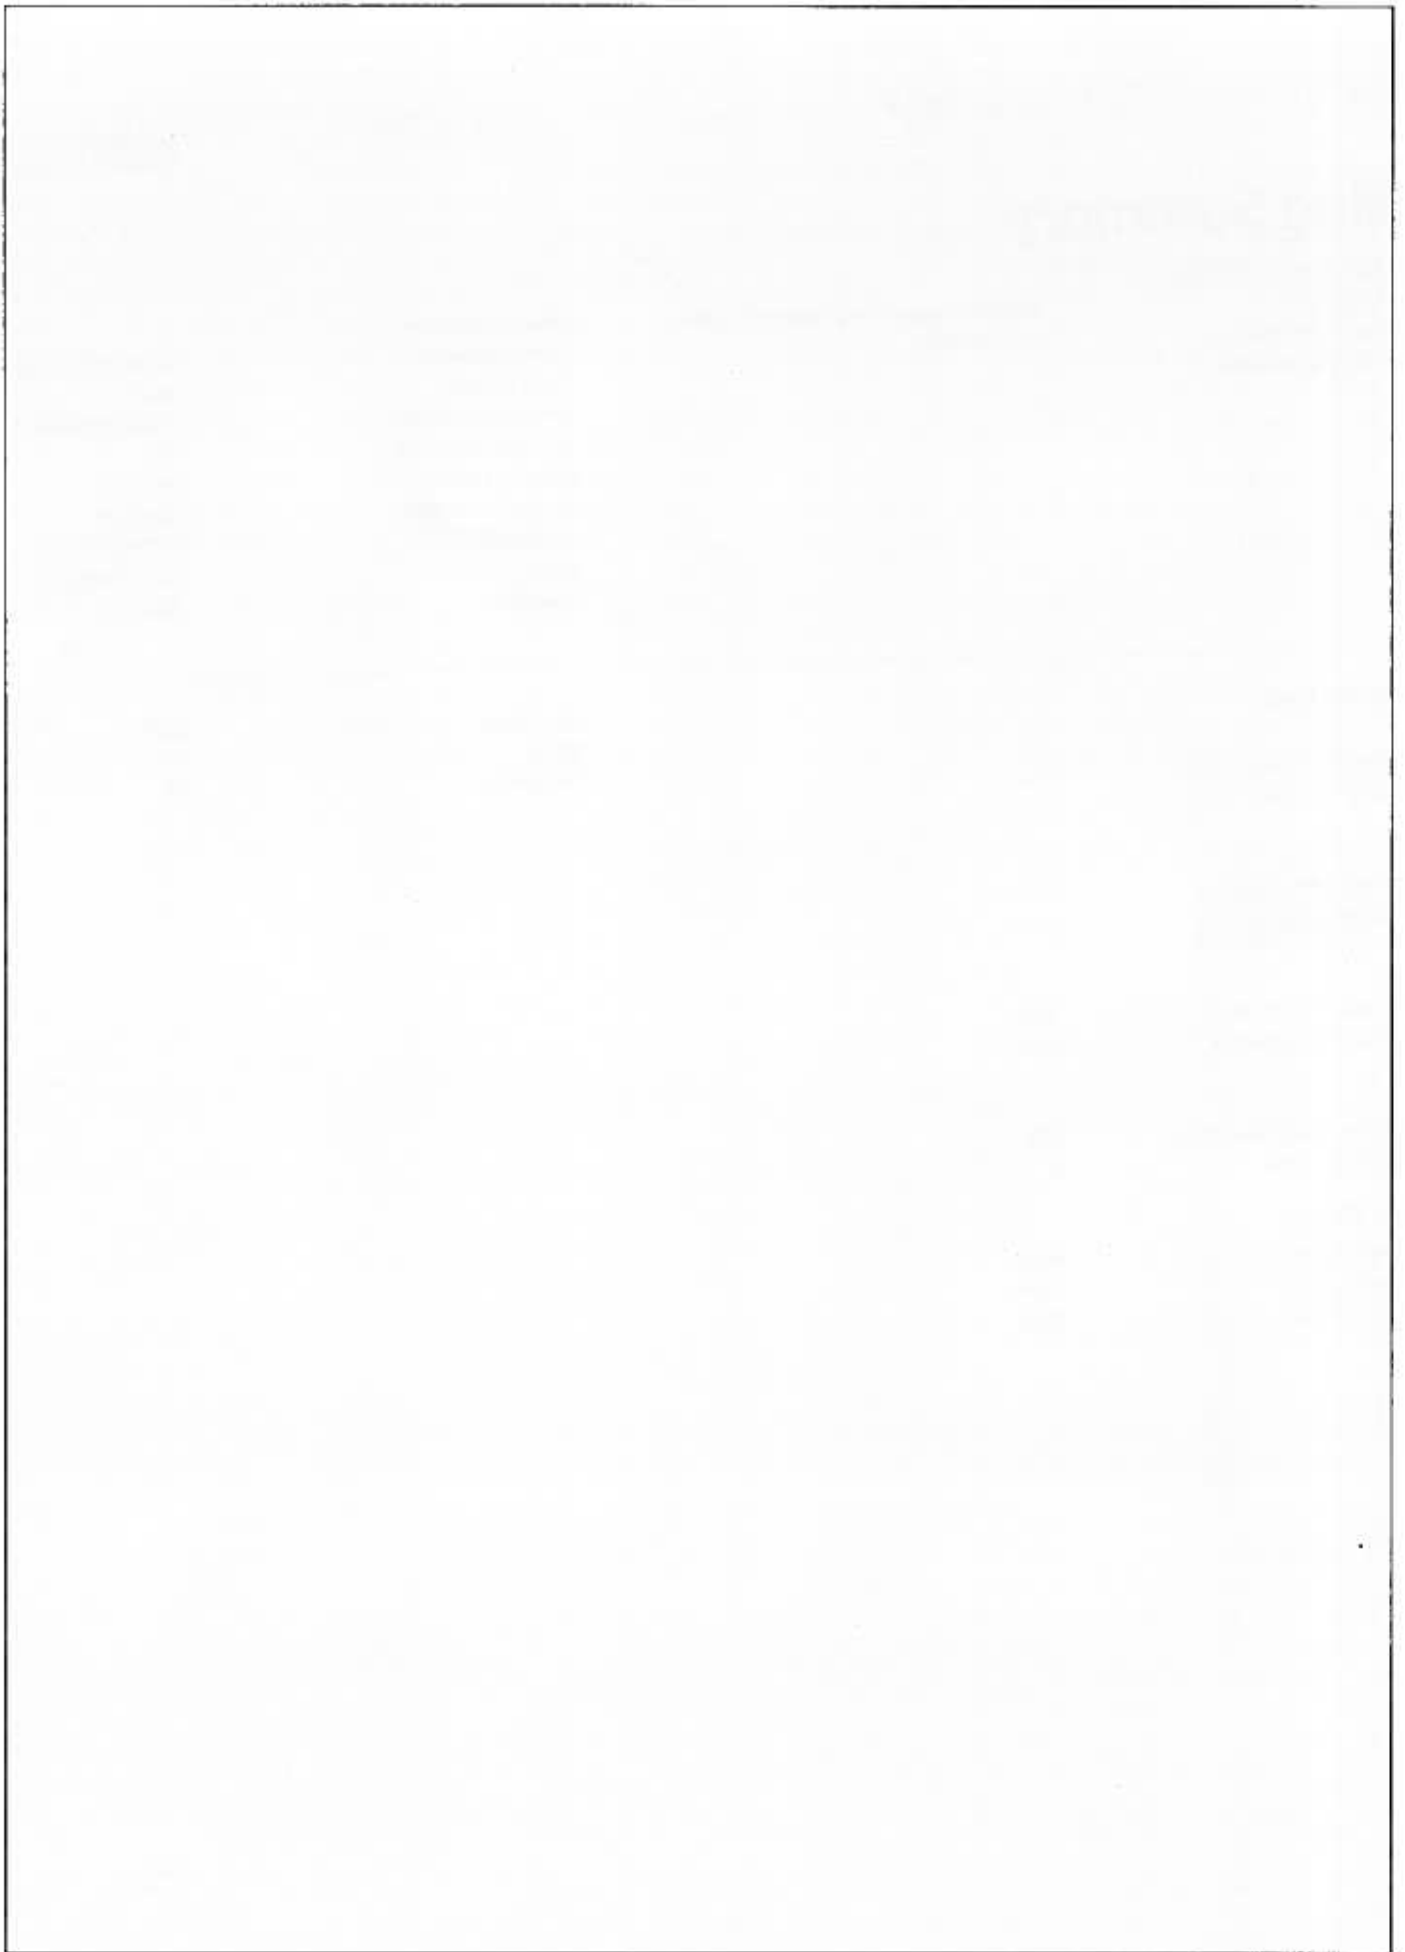

Common User Data

Machine Name: Xerox VersaLink C415 Color MFP (46:6...
IPv4 Address:
Machine Serial Number: 5334205608
Fax Line 1:
Machine URL:
Machine Activation Date: Jul 17, 2025 17:05:07
Black Impressions: 4897
Color Impressions: 4520
Total Impressions: 9417

Machine Profile

Asset Tag:
Customer Asset Tag:
Service Phone Number:
Customer Support Number:
Supplies Phone Number:
System Administrator: Not set
Machine Location: machine location not set

Managed By

Primary MIB Server:

Machine Hardware

Fax Card: Not Present
Fax Memory Size: 0 MB
Foreign Interface Card: not present
Device RAM Size: 1984 MB
Device Storage Size: used - 2850MB/total - 0MB (eMMC)
IPC Memory Size: 187 MB
Productivity Kit: Not Installed
Finisher Type: Simple Catch Tray
Finisher Punch: None
Finisher Folder: not present
Multi-feed Detection Kit: Not Installed

General Setup

Remote Services: Enabled
Remote Software Download: Enabled
Remote Services Trans. Time: 14:19
Xerox Workplace Cloud: Enabled
E-mail Alerts: Disabled
Service Plan: Neutral
Geographic Region: unknown
GMT Offset: +05:30
Cloning/Installation File Sharing: Allowed (Encrypted Files Only)
iBIG2: Enabled
Lossless: Enabled

Energy Saver

Deep Sleep: Enabled
Energy Saver Mode: Job Activated

Smart Proximity Sensor

Wake on Arrival: Not Available
Sleep on Departure:

Software Versions

Device Software: 122.028.025.19730
Patch Version: None
Network Controller: 122.028.19730
UI Panel Firmware: 6.2
Marking Engine: 230.332
Document Feeder: 230.332
Finisher: 000.000.000
Fax: 000.000.000
Scanner: 230.332

Machine Upgrades

Last Successful Upgrade: July 21, 2025 12:19:28

Media Trays

Tray 1: Plain, White and Letter (8.5 x 11")
Manual Feeder: Plain, White and Letter (8.5 x 11")

Installed Options

PS: Installed

Connectivity

Mobile Workflows

AirPrint Printing: Enabled
Mopria Printing: Enabled
AirPrint / Mopria Scanning: Enabled
Authentication Required: Disabled

Physical Connections

USB Settings
USB Type A Ports: All Enabled
USB Type B Port: Disabled
Wired:
Ethernet MAC Address: Enabled
Ethernet Speed/Duplex Setting: 78:8c:77:46:60:59
Auto: Disabled

Wireless:

Wireless MAC Address:
Network Name (SSID):
BSSID:
Security Mode:
Encryption Algorithm:
Status: Enabled
Wi-Fi Direct: Not Installed
Wireless Hardware: Not Installed

Wi-Fi Protected Setup™ (WPS) Name:
Access Point (SSID):
Show Password on Device Touch Screen:
NFC: Enabled
iBeacon (Bluetooth®) for AirPrint DL...: Enabled
iBeacon Hardware: Not Installed
Bluetooth Device Address:
iBeacon IP Address:

Protocols

TCP/IPv4:

IPv4 Address: Disabled
Subnet Mask: 255.0.0.0
Router/Gateway:
Automatic Addressing: DHCP
DHCP Server:
DHCP Lease Expiration:
BOOTP Broadcast: Disabled
Self Assigned Address State: Enabled
Self Assigned Address:

TCP/IPv6:

Link Local Address: Enabled
fe80::7a8c:77ff:fe46:6059
Use Router Supplied Prefix: Enabled
Stateless Global Address 1:
Stateless Global Address 2:
Manual Address: 2403:022b:48af8:484f:f666:e36a
Use DHCP as directed by a router:
DHCP Addressing:
DHCP Address: fe80::4e42:1eff:fe9e:7967
Default Gateway:
DUID (DHCP Unique Identifier):

DNS Settings:

Requested Host Name: XRX788C77466059
Verified Host Name:
Requested Domain Name:
Verified Domain Name:
Multicast DNS: Enabled
Release DHCP Leases and DNS Registrat...: Disabled
Primary DNS Server:
Prefer IPv6 DNS over IPv4: Enabled

Bonjour:

Bonjour Printer Name: Xerox VersaLink C415 Color MFP (46:6...

HTTP:

Force Traffic over Secure Connection (H...: Yes
IPP: Enabled

SNMP

SNMP v1/v2: Enabled
SNMP v3: Disabled

LPR/LPD:

Raw IP Printing: Enabled
LDAP:

LDAP Server 1 Primary LDAP Address: 0.0.0.389
LDAP Server 1 Search Directory Root:
LDAP Server 1 Secure Connection (LDA...: Disabled
LDAP Server 1 Validate Server Certificate...: Disabled

SMTP

SMTP Server: 0.0.0.25
Connect Encryption (TLS): No Encryption
Validate Server Certificate (TLS):
SMTP Authentication Type: Basic Auth with SMTP

Protocols (cont.)

POP3
 POP3 Server: 0.0.0.0:110
 POP3 Secure Connection (TLS): Disabled
 POP3 Validate Server Certificate:
 E-mail Address:
 NTP: Disabled
 FTP Client: Enabled
 FTP Client Mode: Passive
 Web Services on Device: Enabled

Apps

Printing

Banner Sheet: Enabled
 Error Sheets: Enabled
 Paper Substitution: Enabled
 Tray Priority: 1,5
 Archival Marking Mode: Off
 PostScript: Installed
 Level: 3
 Version: 3021.101

PCL
 Version: 6
 Font Name: Courier
 Custom Color Tables: Enabled
 Label: Not Installed
 Not Present

Fax

Fax Line1:
 Fax Line2:
Server Fax: Enabled
 Repository Protocol: SMB
 Repository Server: 0.0.0.0:0
 Repository Document Path:

Workflow Scanning:

Enabled
Email: Enabled
Scan to Mailbox: Enabled
 Storage Capacity (MB): 672 MB
 Storage Used (MB): 67 MB
 Cleanup of Public Folders: Enabled
 Cleanup of Created Folders: Enabled
 Cleanup Time: Daily

Scan to Home:

Disabled
Scan To: Enabled
 Cloud Services: Disabled
Print From: Enabled
 Saved Jobs for Reprint: Enabled
 Print From USB: Enabled
 Print From MailBox: Disabled
 Cloud Services: Disabled

Accounting

Accounting Mode: None
 Network Accounting: Disabled

Security

Authentication Configuration

Machine UI Authentication:
 Home: Locally on the Device
 Jobs: Unlocked
 Device: Unlocked
 Device Website Authentication: Unlocked
 Authorization: Locally on the Device
 Retrieve E-mail from LDAP: Locally on the Device
Authentication Server: Enabled
Xerox Secure Access: Kerberos
Audit Log: Disabled
IP Sec: Enabled
IP Filtering: Disabled
Security Certificates
 Machine Certificate: Signed
 Root Certificates Installed: 53

802.1x:

Disabled

Job Data Removal:

Scheduled: Disabled

FIPS 140-3:

Disabled

TLS: TLS 1.2 and TLS 1.3

TLS Hash: SHA-1, SHA-256 and above

Trellix Embedded Control: Enhanced Security

Almindelige brugeroplysninger

Maskinnavn:	Xerox VersaLink C415 Color MFP (46:6...
IPv4-adresse:	
Maskinens serienummer:	5334205608
Faxlinie 1:	
Maskinens URL:	
Maskinens aktiveringsdato:	Jul 17, 2025 17:05:07
Sort/hvide tryk:	4898
Farvede tryk:	4522
Samlet antal sider:	9420

Maskinprofil

Xerox-aktiv - Kode	
Kundeaktiv - Kode	
Servicetelefonnummer:	
Telefonnummer til kundesupport:	
Telefonnummer til bestilling af forbrugsst...	
Systemadministrator:	Ikke indstillet
Maskinens placering:	maskinplacering ikke angivet

Administreret af

Primær MB-server:

Maskinens hardware

Faxkort:	Ikke tilgængelig
Faxhukommelse:	0 MB
Foreign Interface-kort:	ikke tilgængelig
Enhedens RAM-størrelse:	1984 MB
Enhedens lagringsstørrelse:	I brug - 3111MB/I alt - 0MB (eMMC)
EPC-hukommelse:	187 MB
Produktivitets sæt:	Ikke installeret
Efterbehandlertype:	Almindelig udfaldsbøtte
Efterbehandler, hulning:	Ingen
Efterbehandlerens faldningsmodul:	Ikke tilgængelig
Detekterings sæt til multifremføring:	Ikke installeret

Generel indstilling

Eksterne funktioner:	Aktiveret
Ekstern softwareindlæsning:	Aktiveret
Eksterne funktioner Overførselstid:	14,19
Xerox Workplace Cloud:	Aktiveret
E-mail-advarsler:	Inaktiveret
Serviceplan:	Neutral
Geografisk område:	Ukendt
Vinter-/sommertid:	+05:30
Installation af kloning:	Tilladt (KUN krypterede filer)
Fildeling:	Aktiveret
IBIG2:	Tabsofri

Energisparer

Dyb dvaletilstand:	Aktiveret
Energisparer:	Opgave aktiveret

Smart nærhedssensor

Aktivering ved ankomst:	ikke tilgængelig
Dvale ved afgang:	

Softwareversioner

Enhedens software:	122.028.025.19730
Udgave af patch-program:	Ingen
Netværkscontroller:	122.028.19730
Firmware til brugergrænseflade:	6.2
Markeringsenhed:	230.332
Dokumentfremfører:	230.332
Efterbehandler:	000.000.000
Fax:	000.000.000
Scanner:	230.332

Maskinopgraderinger:

Sidste opgradering:	Tilladt Juli 21, 2025 12:19:28
---------------------	-----------------------------------

Papirmagasiner

Magasin 1:	Almindeligt, Hvid and Letter (8,5 x ...
Manuel fremfører:	Almindeligt, Hvid and Letter (8,5 x ...

Installeret tilbehør

PS:	Installeret
-----	-------------

Netværksopkobling

Mobile Workflows

AirPrint udskrivning:	Aktiveret
Mopria-udskrivning:	Aktiveret
AirPrint/Mopria scanning:	Aktiveret
Kræver godkendelse:	Inaktiveret

Fysiske tilslutninger

USB-indstillinger

USB-type, A-porte:	Alle aktiveret
USB-type, B-port:	Inaktiveret

Kabeltilsluttet:

Ethernet MAC-adresse:	Aktiveret
Ethernet-hastighed/Duplex-indstilling:	78.8c:77:46:60:59
Trådløs:	Auto
Trådløs MAC-adresse:	Inaktiveret

Trådløs:

Trådløs MAC-adresse:

Netværksnavn (SSID):

BSSID:

Sikkerhed:

Krypteringsalgoritme:

Status:

Wi-Fi Direct:

Trådløs hardware:

Wi-Fi Protected Setup™ (WPS) Navn:

Adgangspunkt (SSID):

Vis adgangskode på enhedens berøringss...

NFC:

iBeacon (Bluetooth®) til AirPrint Di...

iBeacon-hardware:

Bluetooth-enhedens adresse:

iBeacon IP-adresse:

Protokoller

TCP/IP v4:

IPv4-adresse:	Inaktiveret
Subnet-maske:	255.0.0.0
Router/Gateway:	
Automatisk adressering:	DHCP
DHCP-server:	
DHCP-kontraktens gyldighed:	
BOOTP Broadcast:	Inaktiveret
Selvtildelt adresse:	Aktiveret
Selvtildelt adresse:	

TCP/IP v6:

Link lokal adresse:	Aktiveret
Anvend router-tildelt præfiks:	fe80::7a8c:77ff:fe46:6059
Tilstandsløs global adresse 1:	Aktiveret
Tilstandsløs global adresse 2:	
Manuel adresse:	
DHCP-adressering:	
DHCP-adresse:	2400:30:22b:4:8af8:484f:f666:e36a
Standardgateway:	Anvend DHCP som angivet af en router
DUID (DHCP unik identifikator):	fe80::4e42:1eff:fe9e:7967

DNS-indstillinger:

Valgt hostnavn:	XRX788C77466059
Bekræftet hostnavn:	
Valgt domænenavn:	
Bekræftet domænenavn:	
Multicast DNS:	Aktiveret
Udgiv DHCP-lejemål og DNS-registrer...	Inaktiveret
Primær DNS-server:	
Foretræk IPv6 DNS fremfor IPv4:	Aktiveret

Bonjour:

Bonjour-printernavn:	Xerox VersaLink C415 Color MFP (46:6...
----------------------	---

HTTP:

Tving trafik over sikker forbindelse (HT...	Aktiveret
IPP:	Ja
	Aktiveret

SNMP

SNMP v1/v2:	Aktiveret
SNMP v3:	Inaktiveret

LPR/LPD:

Raw IP-udskrivning:

LDAP

LDAP-server 1, primær LDAP-adresse:	0.0.0.0:389
LDAP-server 1, rod for søgebibliotek:	
LDAP-server 1, sikker forbindelse (L...):	Inaktiveret
LDAP-server 1, valider servercertifikat (p...):	Inaktiveret

SMTP

SMTP-server:	0.0.0.0:25
Forbindelseskryptering (TLS):	Ingen kryptering
Valider servercertifikat (TLS):	
SMTP-godkendelsestype:	Grundlæggende godkendelse med SMTP

Protokoller (fortsat)

POP3	
POP3-server:	0.0.0.0:110
POP3 sikker forbindelse (TLS):	Inaktiveret
POP3 valider servercertifikat:	
E-mailadresse:	
NTP:	Inaktiveret
FTP-klient:	Aktiveret
FTP-klienttilstand:	Passiv
Web-funktioner på enhed:	Aktiveret

Apps

Udskriver

Bannerark:	Aktiveret
Fejlark:	Aktiveret
Papirerstatning:	Aktiveret
Udfaldsbakkeprioritet:	1,5
Arkiveringstilstand:	Fra
PostScript:	Installeret
Niveau:	3
Softwareversion:	3021.101
PCL	
Softwareversion:	6
Fontnavn:	Courier
Tabeller over brugerdefinerede farver	Aktiveret
Etiket:	Ikke installeret
Fax:	Ikke tilgængelig
Faxlinje 1:	
Faxlinje 2:	

Serverfax:

Serverfax:	Aktiveret
Protokol for opbevaringssted:	SMB
Server for opbevaringssted:	0.0.0.0
Dokumentsti til opbevaringssted:	

Direkte scanning:

Direkte scanning:	Aktiveret
-------------------	-----------

E-mail:

E-mail:	Aktiveret
---------	-----------

Scan til postboks:

Scan til postboks:	Aktiveret
--------------------	-----------

Lagringskapacitet (MB):	672 MB
Anvendt lagringskapacitet (MB):	67 MB
Planlagt oprydning af fælles mapper:	Aktiveret
Planlagt oprydning af oprettede mapper:	Aktiveret
Oprydningstidspunkt:	Hver dag

Scan til hjem:

Scan til hjem:	Inaktiveret
----------------	-------------

Scan til:

Scan til:	Aktiveret
-----------	-----------

Cloud-tjenester:	Inaktiveret
------------------	-------------

Udskriv fra:

Udskriv fra:	Aktiveret
--------------	-----------

Gemte opgaver til genudskrivning:	Aktiveret
-----------------------------------	-----------

Udskriv fra USB:	Aktiveret
------------------	-----------

Udskriv fra postboks:	Inaktiveret
-----------------------	-------------

Cloud-tjenester:	Inaktiveret
------------------	-------------

Kontering

Konteringsfunktion:	Ingen
Netværkskontering:	Inaktiveret

Sikkerhed

Sikkerhedskonfiguration

Maskinens UI-autorisation:	Lokalt på maskinen
Hjem:	Uilåst
Opgaver:	Uilåst
Enhed:	Uilåst
Godkendelse for enhedens hjemmeside:	Lokalt på maskinen
Autorisation:	Lokalt på maskinen
Hent automatisk e-mail fra LDAP:	Aktiveret
Autorisationsserver:	Kerberos
Xerox-funktionen Sikker adgang:	Inaktiveret
Overvågningslog:	Aktiveret
IP Sec:	Inaktiveret
IP-filtrering:	Inaktiveret
Sikkerhedscertifikater	
Maskincertifikat:	Underskrevet
Antal installerede rodcertifikater:	53
302.1x:	Inaktiveret
Ujernelse af opgavedata:	
Planlagt:	Inaktiveret
IPS 140-3:	Inaktiveret
TLS:	TLS 1.2 og TLS 1.3
TLS Hash:	SHA-1, SHA-256 og derover
Trellix Embedded Control:	Forbedret sikkerhed

Indendelige brugeroplysninger

Maskinnavn:	Xerox VersaLink C415 Color MFP (46.6...
Pv4-adresse:	
Maskinens serienummer:	5334205608
Linje 1:	
Maskinens URL:	
Maskinens aktiveringsdato:	Jul 17, 2025 17:05:07
Hvidt tryk:	4898
Farvede tryk:	4522
Samlet antal sider:	9420

Maskinprofil

Maskin-aktiv - Kode	
Kundeaktiv - Kode	
Servicetelefonnummer:	
Telefonnummer til kundesupport:	
Telefonnummer til bestilling af forbrugsst...	
Systemadministrator:	Ikke indstillet
Maskinens placering:	maskinplacering ikke angivet

Administreret af

Primær MFP-server:

Maskinens hardware

Netkort:	Ikke tilgængelig
Netkorttype:	0 MB
Netkort Interface-kort:	ikke tilgængelig
Enhedens RAM-størrelse:	1984 MB
Enhedens lagringsstørrelse:	1 brug: 3112MB / I alt: 0MB (eMMC)
PC-hukommelse:	187 MB
Produktivitetssæt:	Ikke installeret
Behandlertype:	Almindelig udfaldsbakke
Behandler, hulning:	Ingen
Behandlerens foldningsmodul:	ikke tilgængelig
Detekteringsmodul til multifremføring:	Ikke installeret

Generel indstilling

Netværksfunktioner:	Aktiveret
Netværkssoftwareindlæsning:	Aktiveret
Netværksfunktioner Overførselstid:	14:19
Xerox Workplace Cloud:	Aktiveret
E-mail-advarsler:	Inaktiveret
Serviceplan:	Neutral
Geografisk område:	Ukendt
Konfigurationsrapport ved opstart:	Aktiveret
Vinter-/sommertid:	+05:30
Installation af kloning:	Tilladt (KUN krypterede filer)
Tillad udskrivning af klonfiler:	Aktiveret
Udskrivning:	Aktiveret
IBIG2:	Tabsfri

Energisparer

Dyb dvaletilstand:	Aktiveret
Energisparer:	Opgave aktiveret
Energisparerindstillinger:	120 minutter
Automatisk sluk:	Inaktiveret

Softwareversioner

Enhedens software:	122.028.025.19730
Udgave af patch-program:	Ingen
Netværkscontroller:	122.028.19730
Firmware til brugergrænseflade:	6.2
Brugergrænseflade:	122.028.19730
Markeringsenhed:	230.332
Kopikontrol:	122.028.19730
Dokumentfremfører:	230.332
Efterbehandler:	000.000.000
Fax:	000.000.000
Operativsystem:	230.332
Scanner:	230.332
Softwareopgradering:	005.016
ALTBOOT-softwareopgradering:	005.016

Maskinopgraderinger:

Sidste opgradering:	Jul 21, 2025 12:19:28
Planlagte, automatiske opgraderinger:	Inaktiveret
Starttidspunkt for automatisk opgrad...	Hver dag
Automatisk opgraderingsserver:	0.0.0.0:21

Optrykmagasiner

Magasin 1:	Almindeligt, Hvid and Letter (8,5 x ...
Manuel fremfører:	Almindeligt, Hvid and Letter (8,5 x ...

Netværksopkobling

Mobile Workflows

AirPrint-udskrivning:	Aktiveret
Mopria-udskrivning:	Aktiveret
AirPrint/Mopria scanning:	Aktiveret
Kræver godkendelse:	Inaktiveret
Universaludskrivning:	Inaktiveret
Registreringsstatus for Universaludskriv...	Ikke registreret

Fysiske tilslutninger

USB-indstillinger	
USB-type, A-porte:	Alle aktiveret
USB-type, B-port:	Inaktiveret
Kabeltilsluttet:	Aktiveret
Ethernet MAC-adresse:	78:8c:77:46:60:59
Ethernet-hastighed/Duplex-indstilling:	Auto
Trådløs:	Inaktiveret

Trådløs MAC-adresse:	
Netværksnavn (SSID):	
BSSID:	
Sikkerhed:	
Krypteringsalgoritme:	
Status:	

Wi-Fi Direct:	Aktiveret
Trådløs hardware:	Ikke installeret

Wi-Fi Protected Setup™ (WPS) Navn:	
Forbindelsesmetode:	
Præfiksadresse for undernet:	
Adgangspunkt (SSID):	
Vis adgangskode på enhedens berøringssk...	
NFC:	Aktiveret
iBeacon (Bluetooth®) til AirPrint Di...	Aktiveret
iBeacon-hardware:	Ikke installeret
Bluetooth-enhedens adresse:	
iBeacon IP-adresse:	

Protokoller

TCP/IP v4:	Inaktiveret
IPv4-adresse:	
Subnet-maske:	255.0.0.0
Router/Gateway:	=
Automatisk adressering:	DHCP
DHCP-server:	
DHCP-kontraktens gyldighed:	
BOOTP Broadcast:	Inaktiveret
Selvtildelet adresse:	Aktiveret
Selvtildelet adresse:	
TCP/IP v6:	Aktiveret
Link lokal adresse:	fe80::7a8c:77ff:fe46:6059
Anvend router-tildelet præfiks:	Aktiveret
Tilstandsløs global adresse 1:	=
Tilstandsløs global adresse 2:	=
Manuel adresse:	2403:0:22b:4:8af8:484f:1666:e36a
DHCP-adressering:	Anvend DHCP som angivet af en router
DHCP-adresse:	
Standardgateway:	fe80::4e42:1eff:fe9e:7967
DUID (DHCP unik identifikator):	

DNS-indstillinger:

Valgt hostnavn:	XRX788C77466059
Bekræftet hostnavn:	
Valgt domænenavn:	
Bekræftet domænenavn:	
Multicast DNS:	Aktiveret
Udgiv DHCP-lejemål og DNS-registrer...	Inaktiveret
Primær DNS-server:	=
Alternativ DNS-server 1:	=
Alternativ DNS-server 2:	=
Timeout for DNS-forbindelse:	5
Vedhæft maskindomæne:	Aktiveret
Vedhæft overordnede domæner:	Inaktiveret
Søgeliste for DNS-domænenavn:	
Foretruk IP v6 DNS fremfor IP v4:	Aktiveret

Installeret tilbehør

PS:	Installeret
-----	-------------

Protokoller (fortsat)

Bonjour:	Xerox VersaLink C415 Color MFP (46:6...
Bonjour-printernavn:	Xerox VersaLink C415 Color MFP (46:6...
HTTP:	Aktiveret
Portnummer:	80
Tving trafik over sikker forbindelse (HT...):	Ja
Sikkert HTTP-portnummer:	443
Proxyserver:	Inaktiveret
Proxyserveradresse:	0.0.0.0:8080
IPP:	Aktiveret
Sikker IPP-tilstand:	IPP og sikker IPPS
IPP-netværkssti:	http://631
SNMP:	
SNMP v1/v2:	Aktiveret
SNMP v3:	Inaktiveret
LPR/LPD:	Aktiveret
Portnummer:	515
PDL-skift:	Inaktiveret
Tilsidesættelse af PDL-bonnerark:	Inaktiveret
Raw IP-udskrivning:	Aktiveret
Portnummer 1:	9100
To-vejs:	Inaktiveret
Timeout for opgaveafslutning:	300
PDL-skift:	Inaktiveret
LDAP:	
LDAP-server 1, let genkendeligt navn:	
LDAP-server 1, primær LDAP-adresse:	0.0.0.0:389
LDAP-server 1, alternativ LDAP-adresse:	0.0.0.0:389
LDAP-server 1, rod for søgebibliotek:	
LDAP-server 1, sikker forbindelse (L...):	Inaktiveret
LDAP-server 1, valider servercertifikat (p...):	Inaktiveret
SMTP:	
SMTP-server:	0.0.0.0:25
Forbindelseskryptering (TLS):	Ingen kryptering
Valider servercertifikat (TLS):	
Maks. meddelelsesstørrelse (KB):	10240
Antal fragmenter:	1
Samlet opgavestørrelse (KB):	300000
Begrænsning for opgaveopdeling:	Sidebegrænsning
Loginoplysninger for automatisk e-mail:	Ingen
Legitimationsoplysninger for Walkup-...:	Ingen
SMTP-godkendelsestype:	Grundlæggende godkendelse med SMTP
POP3:	
POP3-server:	0.0.0.0:110
POP3 sikker forbindelse (TLS):	Inaktiveret
E-mailadresse:	
POP3 valider servercertifikat:	
Modtagelse af e-mail via POP3:	Inaktiveret
Send bekræftelse ved anmodning:	Aktiveret
Forside til indkommende e-mail:	Aktiveret
NTP:	
Primær server:	0.0.0.0:123
Alternativ server:	0.0.0.0:123
SLP:	
FTP-klient:	Aktiveret
FTP-klienttilstand:	Passiv
Web-funktioner på enhed:	
WS-Discovery:	Aktiveret
WS-Discovery Multicast:	Aktiveret
WS-udskrivning:	Aktiveret
WS-scanning:	Aktiveret
Web-funktioner:	
Kopiering:	Aktiveret
Digital certifikatstyring og Sikkerhedskon...:	Aktiveret
Registrering af udvidede funktioner:	Aktiveret
Opgavebegrænsninger:	Aktiveret
Udvidet opgavestyring:	Aktiveret
Enheds konfiguration:	Aktiveret
Scanning:	Aktiveret
Administration af arbejdsdiagram for scan...:	Aktiveret
Sessionsdata:	Aktiveret
Konfiguration af brugergrænseflade:	Aktiveret
Konfiguration af EIP-proxy:	Aktiveret
Xerox-funktionen Sikker adgang:	Inaktiveret
EIP SNMP-konfiguration:	Aktiveret
Afsendelse af udskrivning:	Aktiveret
Admin. af scanningskabelon:	Aktiveret
Adgang til stort lager:	Aktiveret
Adgang til kortlæser:	Aktiveret
Konfiguration af autorisation og kon...:	Aktiveret
Eksporier overvågningslog:	Aktiveret
Trellix Embedded Control:	Aktiveret

Apps

Udskriver

Bannerark:	Aktiveret
Sys/Start opgave:	Inaktiveret
Slet tilbageholdte opgaver efter:	3 Day(s) 0 Hour(s) 0 Minut(e)s
Fejlark:	Aktiveret
Papirstatning:	Aktiveret
Udfaldsbakkeprioritet:	1,5
Standardindstilling for kopiering:	1
Standardopgavetype:	Prøvedudskrivning
Standardformat:	x=8.50 inches, y=11.00 inches
Standardpapirfarve:	Hvid
Standardindstilling for 1- eller 2-s...:	1- eller 2-sidet
Standardudfaldsbakke:	Midterbakke
Standardoutputfarve:	Farve
Standard, sorterede sæt:	Aktiveret
Standardindstilling for hæftning:	Ingen hæfteklammer
Forskydning mellem opgaver:	Ingen forskydning mellem opgaver
Arkiveringstilstand:	
PostScript:	Fra
Niveau:	Installeret
Softwareversion:	3
Printkvalitet:	3021.101
PCL:	
Softwareversion:	Udvidet
Pitchstørrelse:	6
Punktstørrelse:	10.00
Fontnavn:	12.00
Linier pr. side:	Courier
Tabeller over brugerdefinerede farver:	60
Etikette:	Aktiveret
	Ikke installeret
	Ikke tilgængelig

Fax:

Faxlinje 1:	
Faxlinje 2:	

Serverfax:

Bekræftelsesark:	Aktiveret
Udskudt start:	Kun fejl
Protokol for opbevaringssted:	Inaktiveret
Server for opbevaringssted:	SMB
Dokumentsti til opbevaringssted:	0.0.0.0/0

Direkte scanning:

Bekræftelsesark:	Aktiveret
Protokol for standardopbevaringssted:	Nej
Server for standardopbevaringssted:	SMB
Dokumentsti til standardopbevarings...:	exchange.gdcipv6.com:21
Loginoplysninger til standardopbevarings...:	Enhed
Alternativ 1: Protokol for opbevarin...:	SMB
Alternativ 1: Server for opbevarings...:	0.0.0.0/0
Alternativ 1 - Sti til opbevaringssted:	
Alternativ 1: Loginoplysninger for opbevar...:	Enhed
Protokol for arbejdsdiagrampulje:	SMB
Server for arbejdsdiagrampulje:	0.0.0.0/0
Sti til arbejdsdiagrampulje:	

E-mail:

Standard for Fra adresse:	Aktiveret
Bekræftelsesark:	Kun fejl
Automatisk afsendelse til dig selv:	Inaktiveret
E-mail-sikkerhed:	Inaktiveret

Scan til postboks:

Vis postbokse efter standard:	Aktiveret
Lagingskapacitet (MB):	Aktiveret
Anvendt lagingskapacitet (MB):	672 MB
Planlagt oprydning af fælles mapper:	Aktiveret
Planlagt oprydning af oprettede mapper:	Aktiveret
Oprydningstidspunkt:	Hver dag
Scan til hjem:	Inaktiveret

Scan til hjem:

Brugervenligt navn:	
Navn på arbejdsdiagram:	
Automatisk oprettelse af underbibli...:	Inaktiveret
Vedhæft brugernavn til sti:	Inaktiveret
Automatisk oprettelse af brugernavsbibli...:	Inaktiveret

Scan til:

Cloud-tjenester:	Aktiveret
Udskriv fra:	Inaktiveret
Gemte opgaver til genudskrivning:	Aktiveret
Udskriv fra USB:	Aktiveret
Udskriv fra postboks:	Inaktiveret
Cloud-tjenester:	Inaktiveret

Kontering

Konteringsfunktion:	Ingen
Netværkskontering:	Inaktiveret

Sikkerhed**Sikkerhedskonfiguration**

Maskinens UI-autorisation:	Lokalt på maskinen
Hjem:	Ulåst
Opgaver:	Ulåst
Enhed:	Ulåst
Godkendelse for enhedens hjemmeside:	Lokalt på maskinen
Autorisation:	Lokalt på maskinen
Hent automatisk e-mail fra LDAP:	Aktiveret
Autorisationsserver:	Kerberos
Kerberos primær realm:	
Kerberos primær adresse:	0.0.0.0:88
Realm for Kerberos alternativ 1:	
Adresse for Kerberos alternativ 1:	0.0.0.0:88
SMB NT-domæne:	
Domæne for SMB alternativ 1 NT:	
Smartcard controllerserver:	0.0.0.0:443
Smartcard controllerdomæne:	
SmartCard OCSP URL:	
Opgraderingsregler for kortlæser:	Aktiveret
Kortlæserens firmwareversion:	
Xerox-funktionen Sikker adgang:	Inaktiveret
Server for Xerox-funktionen Sikker a...	0.0.0.0:443
Sti til Xerox-funktionen Sikker adgang:	
Overvågningslog:	Aktiveret
IP Sec:	Inaktiveret
IP-filtrering:	Inaktiveret
Sikkerhedscertifikater	
Maskincertifikat:	Underskrevet
Antal installerede rodcertifikater:	53
802.1x:	Inaktiveret
Fjernelse af opgavedata:	
Planlagt:	Inaktiveret
Planlagt hyppighed:	
FIPS 140-3:	Inaktiveret
TLS:	TLS 1.2 og TLS 1.3
TLS Hash:	SHA-1, SHA-256 og derover
Trellix Embedded Control:	Forbedret sikkerhed

Indstilling af udvidede funktioner

3. generations browser:	X3G_3.24.23_2.40.5_012_01.00.00
Widget-version:	v1.3.17 c8 20140613
Widget-version:	v2.5.04 g9 20240123

