

Common User Data

Machine Name:	Xerox AltaLink B8170 (A0:F5:BD)
IPv4 Address:	Connecting...
Machine Serial Number:	HHZ762811
Fax Line1:	3338
Machine URL:	Connecting...
Machine Activation Date:	Sep 17, 2025 22:17:28
Total Impressions:	659

Machine Profile

Xerox Asset Tag:	
Customer Asset Tag:	
Service Phone Number:	
Customer Support Number:	
Supplies Phone Number:	
Recycling Phone Number:	
System Administrator:	Not set
Machine Location:	machine location not set
Managed By	
Primary MB Server:	

Machine Hardware

Fax Card:	Embedded; 2 Lines
Fax Memory Size:	966 MB
Foreign Interface Card:	not present
Device RAM Size:	8192 MB
Device Storage Size:	used=3562MB/total=500107MB (HDD)
EPC Memory Size:	512 MB
Finisher Type:	Offsetting Catch Tray
Finisher Punch:	None
Finisher Folder:	not present
Multi-feed Detection Kit:	Not Installed

General Setup

Remote Services:	Enabled
Remote Software Download:	Enabled
Remote Services Trans. Time:	00:47
Xerox Workplace Cloud	Enabled
E-mail Alerts:	Disabled
Service Plan:	Metered
Billing Impression Mode:	A3 Impressions
Geographic Region:	unknown
GMT Offset:	+05:30
Cloning Installation	Allowed (Encrypted Files Only)
File Sharing	Enabled
JBIG2	Lossless
Energy Saver	
Deep Sleep:	Disabled
Energy Saver Mode:	Job Activated

Smart Proximity Sensor

Wake on Arrival:	Enabled
Sleep on Departure:	Disabled

Software Versions

Device Software:	123.014.005.26700
Patch Version:	None
Network Controller:	123.014.26700
UI Panel Firmware:	003.005.00000
Marking Engine:	064.023.000
Document Feeder:	001.035.000
Finisher:	000.000.000
Fax:	003.022.004
Scanner:	017.025.003
Machine Upgrades:	Allowed
Last Successful Upgrade:	September 26, 2025 11:00:29

Media Trays

Tray 1:	Plain, White and A4 (210 x 297 mm)
Tray 2:	Plain, White and A4 (210 x 297 mm)
Tray 3:	Plain, White and A4 (210 x 297 mm)
Tray 4:	Plain, White and A4 (210 x 297 mm)
Bypass Tray:	Plain, White and A3 (297 x 420 mm)

Installed Options

PS:	Installed
-----	-----------

Connectivity

Mobile Workflows	
AirPrint Printing:	Enabled
Mopria Printing:	Enabled
AirPrint / Mopria Scanning	Enabled
Authentication Required:	Disabled
Physical Connections	
USB Settings	
USB Type A Ports	All Enabled
USB Type B Port	Disabled
Wired:	
Ethernet MAC Address:	9c:93:4e:a0:f5:bd
Ethernet Speed/Duplex Setting:	auto
Wireless:	
Wireless MAC Address:	
Network Name (SSID):	Xerox Lab User
BSSID:	
Security Mode:	WPA2 Personal
Encryption Algorithm:	AUTO
Status:	Not Connected
Wi-Fi Direct:	
Wireless Hardware:	Not Installed
Wi-Fi Protected Setup™ (WPS) Name:	
Access Point (SSID):	
Show Password on Device Touch Screen:	
NFC:	Enabled
iBeacon (Bluetooth®) for AirPrint Di...	Enabled
iBeacon Hardware:	Not Installed
Bluetooth Device Address:	
iBeacon IP Address:	

Protocols

TCP/IPv4:	
IPv4 Address:	Enabled
Subnet Mask:	Connecting...
Router/Gateway:	255.0.0.0
Automatic Addressing:	::
DHCP Server:	DHCP
DHCP Lease Expiration:	
BOOTP Broadcast:	Disabled
Self Assigned Address State:	Enabled
Self Assigned Address:	
TCP/IPv6:	
Link Local Address:	
Use Router Supplied Prefix:	Enabled
Stateless Global Address 1:	
Stateless Global Address 2:	
Manual Address:	
DHCP Addressing:	
DHCP Address:	
Default Gateway:	
DUID (DHCP Unique Identifier):	
DNS Settings:	
Requested Host Name:	XXR9C934EA0F5BD
Verified Host Name:	
Requested Domain Name:	
Verified Domain Name:	
Multicast DNS:	Enabled
Release DHCP Leases and DNS Registrati...	Disabled
Primary DNS Server:	::
Prefer IPv6 DNS over IPv4:	Enabled
Bonjour:	
Bonjour Printer Name:	Xerox AltaLink B8170 (A0:F5:BD)
HTTP:	
Force Traffic over Secure Connection (H...	Enabled
IPP	Yes
SNMP	
SNMP v1/v2:	Enabled
SNMP v3:	Disabled
LPR/LPD:	Enabled
Raw IP Printing:	Enabled
LDAP	
LDAP Server 1 Primary LDAP Address:	0.0.0.0:389
LDAP Server 1 Search Directory Root:	
LDAP Server 1 Secure Connection (LDA...	Disabled
LDAP Server 1 Validate Server Certificate...	Disabled
SMTP	
SMTP Server:	10.61.10.8:25
Connect Encryption (TLS):	No Encryption
Validate Server Certificate (TLS):	
SMTP Authentication Type:	Basic Auth with SMTP

## Protocols (cont.)

<b>POP3</b>	
POP3 Server:	0.0.0.0:110
POP3 Secure Connection (TLS):	Disabled
POP3 Validate Server Certificate:	
E-mail Address:	
<b>FTP:</b>	
FTP Client:	Enabled
FTP Client Mode:	Enabled
FTP Client Mode:	Passive
Web Services on Device:	Enabled

## Apps

## Printing

Banner Sheet:	Disabled
Error Sheets:	Enabled
Paper Substitution:	Enabled
Tray Priority:	1,2,3,4,5
PostScript	Installed
Level:	3
Version:	3021.101

<b>PCL</b>	
Version:	6
Font Name:	Courier
Custom Color Tables	Enabled
Label:	Not Installed

<b>Fax:</b>	
Fax Line1:	Enabled/Displayed
Fax Line2:	3338

<b>Server Fax:</b>	
Repository Protocol:	Enabled
Repository Server:	SMB
Repository Server:	10.61.23.93:445
Repository Document Path:	/

<b>Workflow Scanning:</b>	
Email:	Enabled
<b>Scan to Mailbox:</b>	
Storage Capacity (MB):	Disabled
Storage Used (MB):	23443 MB
Storage Used (MB):	1267 MB
Cleanup of Public Folders:	Enabled
Cleanup of Created Folders:	Enabled
Cleanup Time:	Daily

<b>Scan to Home:</b>	
Scan To:	Disabled

<b>Cloud Services:</b>	
Cloud Services:	Enabled

<b>Print From:</b>	
Saved Jobs for Reprint:	Enabled

<b>Print From USB:</b>	
Print From USB:	Enabled

<b>Print From MailBox:</b>	
Print From MailBox:	Disabled

<b>Cloud Services:</b>	
Cloud Services:	Disabled

## Accounting

Accounting Mode:	None
Network Accounting:	Disabled

## Security

## Authentication Configuration

<b>Machine UI Authentication:</b>	
Home:	Locally on the Device
Jobs:	Unlocked
Device:	Unlocked
Device:	Unlocked
<b>Device Website Authentication:</b>	
Authorization:	Locally on the Device
Retrieve E-mail from LDAP:	Enabled

<b>Authentication Server:</b>	
Xerox Secure Access:	Kerberos

<b>Audit Log:</b>	
Audit Log:	Disabled

<b>IP Sec:</b>	
IP Sec:	Enabled

<b>IP Filtering:</b>	
IP Filtering:	Disabled

<b>Security Certificates</b>	
Machine Certificate:	Signed

<b>Root Certificates Installed:</b>	
Root Certificates Installed:	54

<b>802.1x:</b>	
802.1x:	Disabled

<b>Image Overwrite</b>	
Image Overwrite:	Installed/Enabled

<b>Scheduled:</b>	
Scheduled:	Disabled

<b>FIPS 140-3:</b>	
FIPS 140-3:	Disabled

<b>TLS:</b>	
TLS:	TLS 1.2 and TLS 1.3

<b>TLS Hash:</b>	
TLS Hash:	SHA-1, SHA-256 and above

<b>Trellix Embedded Control:</b>	
Trellix Embedded Control:	Enhanced Security

## Common User Data

Machine Name: Xerox AltaLink B8170 (A0:F5:8D)  
IPv4 Address: 10.61.11.233  
Machine Serial Number: HHZ762811  
Fax Line1: 3338  
Machine URL: https://10.61.11.233  
Machine Activation Date: Sep 17, 2025 22:17:28  
Total Impressions: 668

## Machine Profile

Xerox Asset Tag:  
Customer Asset Tag:  
Service Phone Number:  
Customer Support Number:  
Supplies Phone Number:  
Recycling Phone Number:  
System Administrator:  
Machine Location:  
Managed By  
Primary MB Server:

## Machine Hardware

Fax Card: Embedded; 2 Lines  
Fax Memory Size: 966 MB  
Foreign Interface Card: not present  
Device RAM Size: 8192 MB  
Device Storage Size: used=3630MB/total=500107MB (HDD)  
EPC Memory Size: 512 MB  
Finisher Type: Offsetting Catch Tray  
Finisher Punch: None  
Finisher Folder: not present  
Multi-feed Detection Kit: Not Installed

## General Setup

Remote Services: Enabled  
Remote Software Download: Enabled  
Remote Services Trans. Time: 00:47  
Xerox Workplace Cloud: Enabled  
E-mail Alerts: Disabled  
Service Plan: Metered  
Billing Impression Mode: A3 Impressions  
Geographic Region: unknown  
Startup Config Report: Enabled  
GMT Offset: +05:30  
Cloning Installation: Allowed (Encrypted Files Only)  
Allow Print Submission of Clone Files: Disabled  
File Sharing: Enabled  
JBIG2: Lossless

## Energy Saver

Deep Sleep: Disabled  
Energy Saver Mode: Job Activated  
Sleep Mode Timer: 0 minutes  
Auto-Off: Disabled

## Smart Proximity Sensor

Wake on Arrival: Enabled  
Sleep on Departure: Disabled  
Maximize Detection Range: Disabled

## Software Versions

Device Software: 123.014.005.26700  
Patch Version: None  
Network Controller: 123.014.26700  
UI Panel Firmware: 003.005.00000  
User Interface: 123.014.26700  
Marking Engine: 064.023.000  
Copy Controller: 123.014.26700  
Document Feeder: 001.035.000  
Finisher: 000.000.000  
Fax: 003.022.004  
OS: 123.005.26600  
Scanner: 017.025.003  
Software Upgrade: 123.014.26700

## Machine Upgrades

Last Successful Upgrade: Allowed  
Scheduled Auto Upgrades: September 26, 2025 11:00:29  
Auto Upgrade Start Time: Disabled  
Auto Upgrade Server: Daily  
0.0.0.0:21

## Media Trays

Tray 1: Plain, White and A4 (210 x 297 mm)  
Tray 2: Plain, White and A4 (210 x 297 mm)  
Tray 3: Plain, White and A4 (210 x 297 mm)  
Tray 4: Plain, White and A4 (210 x 297 mm)  
Bypass Tray: Plain, White and A3 (297 x 420 mm)

## Connectivity

## Mobile Workflows

AirPrint Printing: Enabled  
Mopria Printing: Enabled  
AirPrint / Mopria Scanning: Enabled  
Authentication Required: Disabled  
Universal Print: Disabled  
Universal Print Registration Status: Not Registered

## Physical Connections

USB Settings  
USB Type A Ports: All Enabled  
USB Type B Port: Disabled  
Wired: Disabled  
Ethernet MAC Address: 9c:93:4e:a0:f5:bd  
Ethernet Speed/Duplex Setting: auto  
Wireless: Enabled  
Wireless MAC Address: c0:ee:40:d8:49:ce  
Network Name (SSID): Xerox Lab User  
BSSID: bc:26:c7:9e:82:2e  
Security Mode: WPA2 Personal  
Encryption Algorithm: AUTO  
Status: Connected  
Wi-Fi Direct: Enabled  
Wireless Hardware: Installed  
Wi-Fi Protected Setup™ (WPS) Name: Xerox AltaLink B8170 (A0:F5:8D)  
Connection Method: Push Button Configuration (PBC)  
Subnet Prefix Address: 172.21.189.0/24  
Access Point (SSID): DIRECT-KR-Xerox AltaLink B8170  
Show Password on Device Touch Screen: Enabled  
NFC: Enabled  
iBeacon (Bluetooth®) for AirPrint Di...: Enabled  
iBeacon Hardware: Installed  
Bluetooth Device Address: C0:EE:40:D8:49:CF  
iBeacon IP Address: 10.61.11.233

## Protocols

TCP/IPv4: Enabled  
IPv4 Address: 10.61.11.233  
Subnet Mask: 255.255.255.0  
Router/Gateway: 10.61.11.1  
Automatic Addressing: DHCP  
DHCP Server: DHCP  
DHCP Lease Expiration: Disabled  
BOOTP Broadcast: Enabled  
Self Assigned Address State: Disabled  
Self Assigned Address: Enabled  
TCP/IPv6: Disabled  
Link Local Address: Disabled  
Use Router Supplied Prefix: Disabled  
Stateless Global Address 1: Disabled  
Stateless Global Address 2: Disabled  
Manual Address: Disabled  
DHCP Addressing: Disabled  
DHCP Address: Disabled  
Default Gateway: Disabled  
DUID (DHCP Unique Identifier): Disabled  
DNS Settings: XRX9C934EA0F58D  
Requested Host Name: Disabled  
Verified Host Name: Disabled  
Requested Domain Name: Disabled  
Verified Domain Name: Disabled  
Multicast DNS: Enabled  
Release DHCP Leases and DNS Registrati...: Disabled  
Primary DNS Server: 10.61.7.16  
Alternate DNS Server 1: 10.61.10.6  
Alternate DNS Server 2: 10.61.7.15  
DNS Connection Timeout: 5  
Append Device Domain: Enabled  
Append Parent Domains: Disabled  
DNS Domain Search List: XEROXQA.COM  
Prefer IPv6 DNS over IPv4: Enabled

## Installed Options

PS: Installed

## Protocols (cont.)

Bonjour:	
Bonjour Printer Name:	Xerox AltaLink B8170 (A0:F5:BD)
HTTP:	Enabled
Port Number:	80
Force Traffic over Secure Connection (HTTPS):	Yes
Secure HTTP Port Number:	443
Proxy Server:	Automatic
Proxy Server Address:	0.0.0.0:8080
IPP:	Enabled
Secure IPP Mode:	IPP and Secure IPPS
IPP Network Path:	http://10.61.11.233:631
SNMP:	
SNMP v1/v2:	Enabled
SNMP v3:	Disabled
LP/LPD:	Enabled
Port Number:	515
FDL Switching:	Disabled
FDL Banner Override:	Disabled
Raw IP Printing:	Enabled
Port Number 1:	9100
Bi-directional:	Disabled
End of Job Timeout:	300
FDL Switching:	Disabled
LDAP:	
LDAP Server 1 Friendly Name:	
LDAP Server 1 Primary LDAP Address:	0.0.0.0:389
LDAP Server 1 Alternate LDAP Address:	0.0.0.0:389
LDAP Server 1 Search Directory Root:	
LDAP Server 1 Secure Connection (LDAPS):	Disabled
LDAP Server 1 Validate Server Certificate:	Disabled
SMTP:	
SMTP Server:	10.61.10.8:25
Connect Encryption (TLS):	No Encryption
Validate Server Certificate (TLS):	
Max Message Size (KB):	10240
Number of Fragments:	1
Total Job Size (KB):	300000
Job Splitting Boundary:	Page Boundary
Credentials for Auto E-mails:	None
Credentials for Walkup User:	None
SMTP Authentication Type:	Basic Auth with SMTP
POP3:	
POP3 Server:	0.0.0.0:110
POP3 Secure Connection (TLS):	Disabled
E-mail Address:	
POP3 Validate Server Certificate:	
Receipt of E-mail via POP3:	Disabled
Send Confirmation Request:	Enabled
Incoming E-mail cover sheet:	Enabled
NTTP:	
Primary Server:	[2403:0:22b:4:a14d:38b3:33b:477a]:123
Alternate Server:	[2403:0:22b:4:39f0:35cd:e8a8:3087]:123
SLP:	Disabled
FTP Client:	Enabled
FTP Client Mode:	Passive
Web Services on Device:	Enabled
WS-Discovery:	Enabled
WS-Discovery Multicast:	Enabled
WS-Print:	Enabled
WS-Scan:	Enabled
Web Services:	
Copy Submissions:	Enabled
Digital Certificate Management and Security:	Enabled
Extensible Service Registration:	Enabled
Job Limits:	Enabled
Job Management Extension:	Enabled
Device Configuration:	Enabled
Scan Submission:	Enabled
Scan Workflow Management:	Enabled
Session Data:	Enabled
User Interface Configuration:	Enabled
EIP Proxy Configuration:	Enabled
Xerox Secure Access:	Disabled
EIP SNMP Configuration:	Enabled
Print Submission:	Enabled
Scan Template Mgmt:	Enabled
Mass Storage Access:	Enabled
Card Reader Access:	Enabled
Authentication & Accounting Configuration:	Enabled
Export Audit Log:	Enabled
Trellix Embedded Control:	Enabled

## Apps

## Printing

Banner Sheet:	Disabled
Sys/Start Job:	Disabled
Delete Held Jobs After:	3 Day(s) 0 Hour(s) 0 Minute(s)
Error Sheets:	Enabled
Paper Substitution:	Enabled
Tray Priority:	1,2,3,4,5
Default Copies:	1
Default Job Type:	Normal Print
Default Paper Size:	x=210mm, y=297mm
Default Paper Color:	White
Default 2 Sided Printing:	2 Sided
Default Output Tray:	Output Catch Tray
Default Output Color:	Black & White
Default Collated Sets:	Enabled
Default Stapling:	Not Available
Offsetting Between Jobs:	Offset Between Jobs
PostScript:	Installed
Level:	3
Version:	3021.101
Image Quality:	Standard
PCL:	
Version:	6
Pitch Size:	10.00
Point Size:	12.00
Font Name:	Courier
Lines Per Page:	64
Custom Color Tables:	Enabled
Label:	Not Installed

Fax:	Enabled/Displayed
Fax Line1:	3338
Fax Line2:	

## Server Fax:

Confirmation Sheet:	Enabled
Errors Only:	Errors Only
Delay Start:	Disabled
Repository Protocol:	SMB
Repository Server:	10.61.23.93:445
Repository Document Path:	/

## Workflow Scanning:

Confirmation Sheet:	Enabled
Errors Only:	Errors Only
Default Repository Protocol:	SMB
Default Repository Server:	10.61.23.93:445
Default Repository Document Path:	/
Default Repository Login Credentials:	Device
Alt1 Repository Protocol:	SMB
Alt1 Repository Server:	0.0.0.0:0
Alt1 Repository Document Path:	
Alt1 Repository Login Credentials:	Device
Workflow Pool Protocol:	SMB
Workflow Pool Server:	0.0.0.0:0
Workflow Pool Path:	

## Email:

Default From Address:	syed.habibunnisa@xeroxqa.com
Confirmation Sheet:	Errors Only
Auto Send to Self:	Disabled
E-mail Security:	Disabled

## Scan to Mailbox:

View Mailboxes by Default:	Enabled
Storage Capacity (MB):	23443 MB
Storage Used (MB):	1268 MB
Cleanup of Public Folders:	Enabled
Cleanup of Created Folders:	Enabled
Cleanup Time:	Daily

## Scan to Home:

Friendly Name:	Disabled
Workflow Name:	
Auto Create Subdir:	Disabled
Append User Name to Path:	Disabled
Auto Create User Name Dir:	Disabled

## Scan To:

Cloud Services:	Disabled
-----------------	----------

## Print From:

Saved Jobs for Reprint:	Enabled
Print From USB:	Enabled
Print From MailBox:	Disabled
Cloud Services:	Disabled



**Accounting**

Accounting Mode: None  
Network Accounting: Disabled

**Security****Authentication Configuration**

Machine UI Authentication: Locally on the Device  
Home: Unlocked  
Jobs: Unlocked  
Device: Unlocked  
Device Website Authentication: Locally on the Device  
Authorization: Locally on the Device  
Retrieve E-mail from LDAP: Enabled  
Authentication Server: Kerberos

Kerberos Primary Realm:  
Kerberos Primary Address: 0.0.0.88  
Kerberos Alt 1 Realm:  
Kerberos Alt 1 Address: 0.0.0.88  
SMB NT Domain:  
SMB Alt 1 NT Domain:  
Smartcard Ctrl Server: 0.0.0.443  
Smartcard Ctrl Domain:  
SmartCard OCSP URL:  
Card Reader Upgrade Policy: Enabled  
Card Reader Firmware Version:

Xerox Secure Access:  
Secure Access Server: 0.0.0.443  
Secure Access Path:

Audit Log: Enabled

IP Sec: Disabled

IP Filtering: Disabled

**Security Certificates**

Machine Certificate: Signed  
Root Certificates Installed: 54  
802.1x: Disabled

**Image Overwrite**

Immediate: Installed/Enabled

Scheduled: Disabled

Scheduled Frequency:

FIPS 140-3: Disabled

TLS: TLS 1.2 and TLS 1.3

TLS Hash: SHA-1, SHA-256 and above


Trellix Embedded Control: Enhanced Security

**Extensible Service Setup**

Third Generation Browser: X3G\_3.24.23\_2.40.5\_011\_01.00.00

Widget Version: v1 3.17 c8 20140613

Widget Version: v2 5.04 g9 20240123

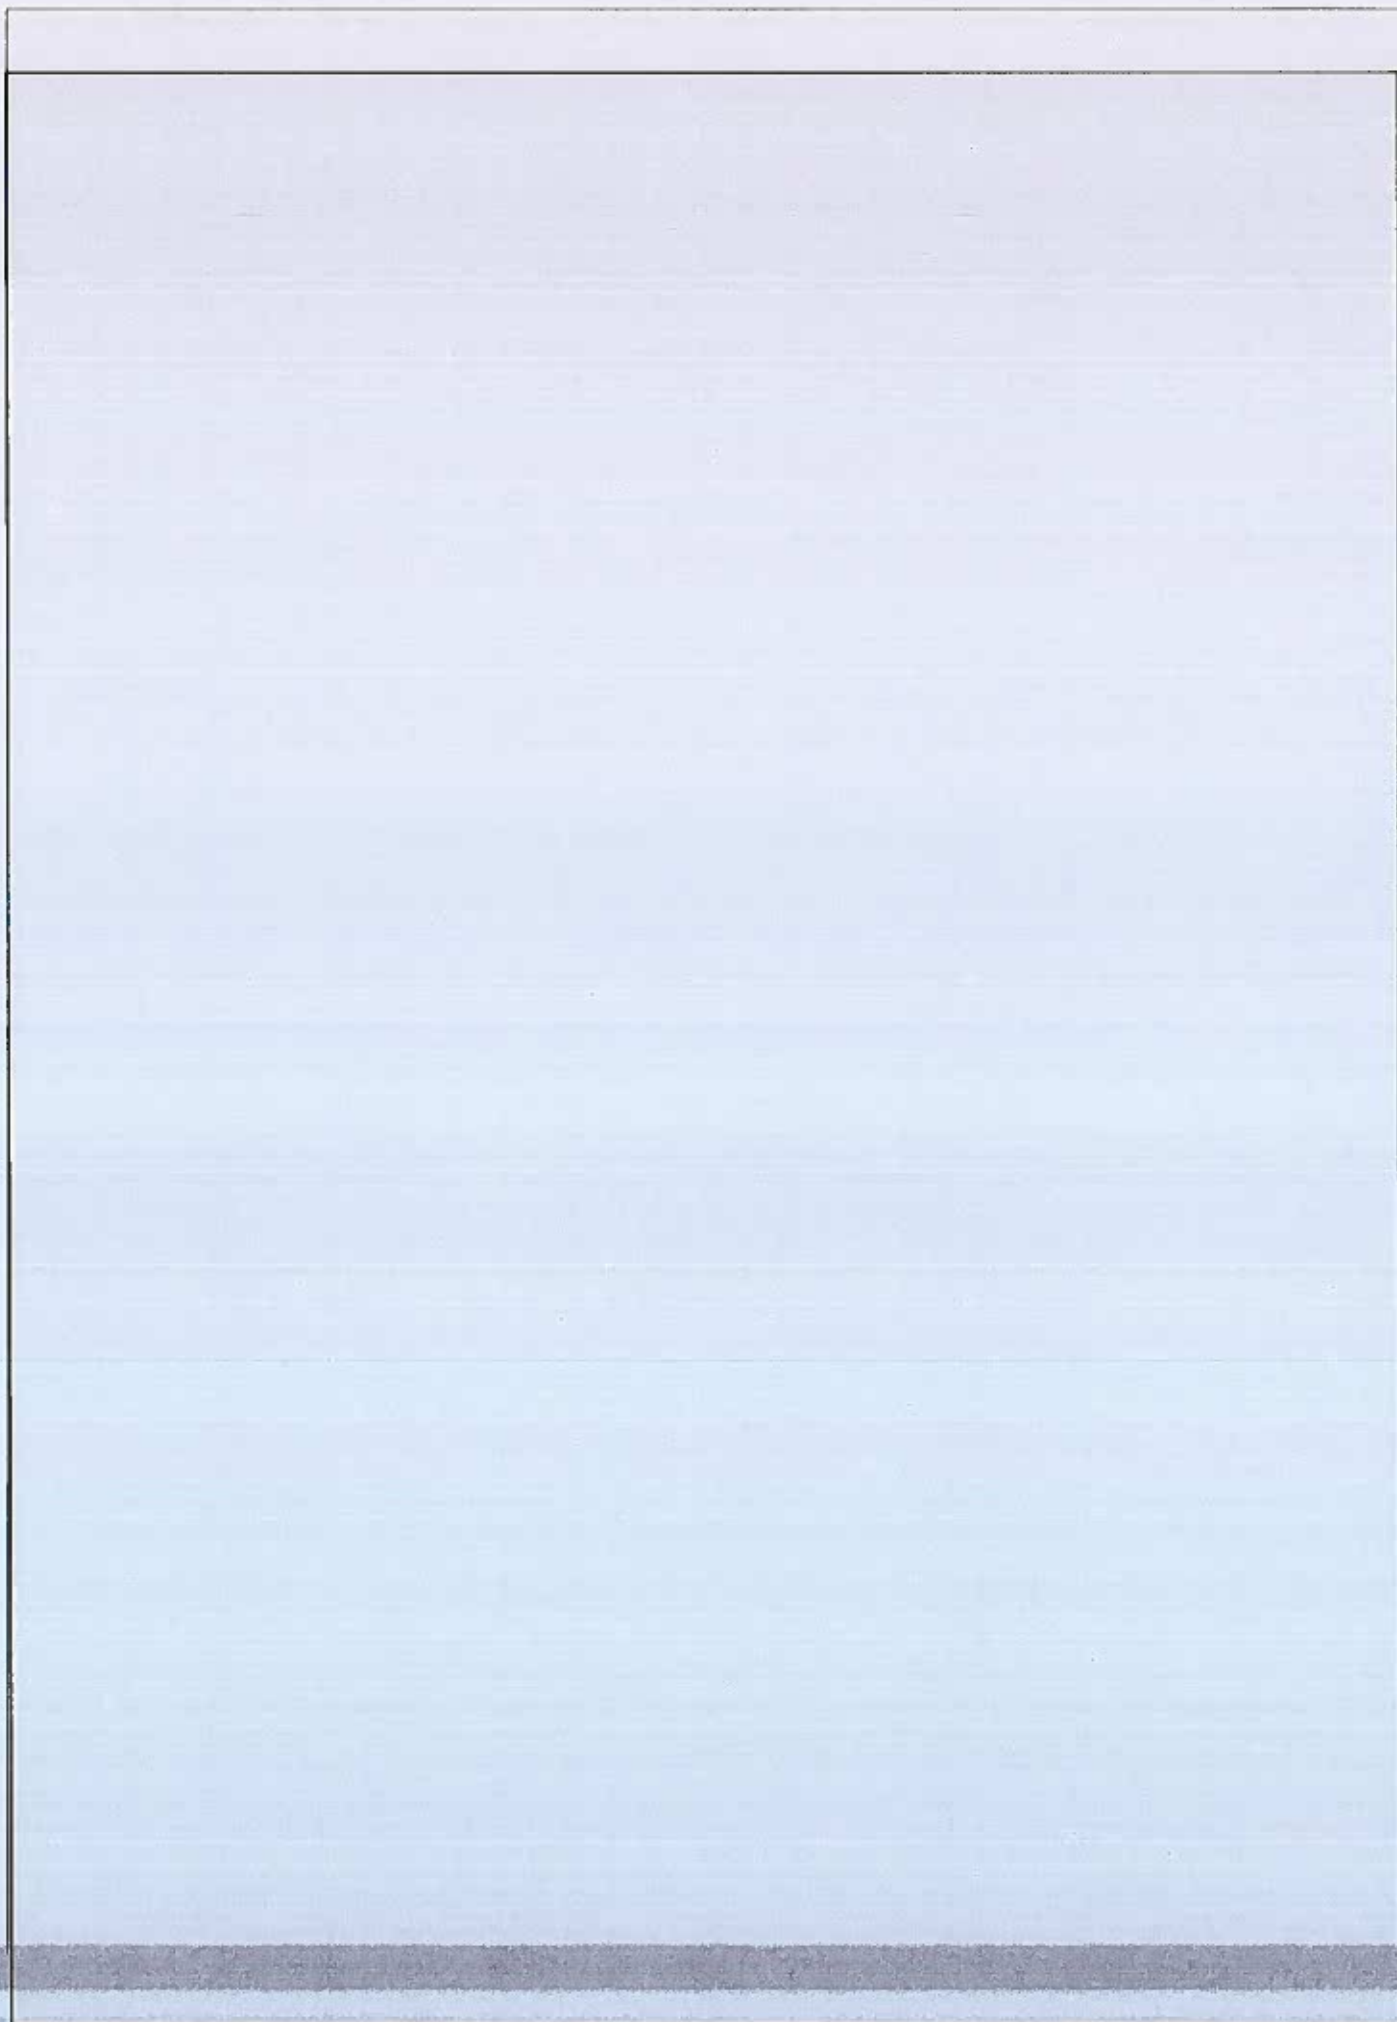

Common User Data

Machine Name:	Xerox AltaLink B8170 (A0:F5:BD)
Machine Serial Number:	HHZ762811
Fax Line1:	3338
Machine Activation Date:	Sep 17, 2025 22:17:28
Total Impressions:	663

Machine Profile

Xerox Asset Tag:	
Customer Asset Tag:	
Service Phone Number:	
Customer Support Number:	
Supplies Phone Number:	
Recycling Phone Number:	
System Administrator:	Not set
Machine Location:	machine location not set
Managed By	
Primary MB Server:	

Machine Hardware

Fax Card:	Embedded; 2 Lines
Fax Memory Size:	966 MB
Foreign Interface Card:	not present
Device RAM Size:	8192 MB
Device Storage Size:	used=3607MB/total=500107MB (HDD)
EPC Memory Size:	512 MB
Finisher Type:	Offsetting Catch Tray
Finisher Punch:	None
Finisher Folder:	not present
Multi-feed Detection Kit:	Not Installed

General Setup

Remote Services:	Enabled
Remote Software Download:	Enabled
Remote Services Trans. Time:	00:47
Xerox Workplace Cloud	Enabled
E-mail Alerts:	Disabled
Service Plan:	Metered
Billing Impression Mode:	A3 Impressions
Geographic Region:	unknown
GMT Offset:	+05:30
Cloning Installation	Allowed (Encrypted Files Only)
File Sharing	Enabled
JBIG2	Lossless

Energy Saver

Deep Sleep:	Disabled
Energy Saver Mode:	Job Activated

Smart Proximity Sensor

Wake on Arrival:	Enabled
Sleep on Departure:	Disabled

Software Versions

Device Software:	123.014.005.26700
Patch Version:	None
Network Controller:	123.014.26700
UI Panel Firmware:	003.005.00000
Marking Engine:	064.023.000
Document Feeder:	001.035.000
Finisher:	000.000.000
Fax:	003.022.004
Scanner:	017.025.003
Machine Upgrades:	Allowed
Last Successful Upgrade:	September 26, 2025 11:00:29

Media Trays

Tray 1:	Plain, White and A4 (210 x 297 mm)
Tray 2:	Plain, White and A4 (210 x 297 mm)
Tray 3:	Plain, White and A4 (210 x 297 mm)
Tray 4:	Plain, White and A4 (210 x 297 mm)
Bypass Tray:	Plain, White and A3 (297 x 420 mm)

Installed Options

PS:	Installed
-----	-----------

Connectivity

Mobile Workflows

AirPrint Printing:	Enabled
Mopria Printing:	Enabled
AirPrint / Mopria Scanning	Enabled
Authentication Required:	Disabled

Physical Connections

USB Settings

USB Type A Ports	All Enabled
USB Type B Port	Disabled
Wired:	Enabled
Ethernet MAC Address:	9c:93:4e:a0:f5:bd
Ethernet Speed/Duplex Setting:	auto
Wireless:	Disabled

Wireless MAC Address:

Network Name (SSID):

BSSID:

Security Mode:

Encryption Algorithm:

Status:

Wi-Fi Direct:

Wireless Hardware:

Wi-Fi Protected Setup™ (WPS) Name:

Access Point (SSID):

Show Password on Device Touch Screen:

NFC:

iBeacon (Bluetooth®) for AirPrint Di...

iBeacon Hardware:

Bluetooth Device Address:

iBeacon IP Address:

Enabled

Not Installed

Enabled

Enabled

Not Installed

Protocols

TCP/IPv4:

IPv4 Address:	Disabled
---------------	----------

Subnet Mask:

Router/Gateway:

Automatic Addressing:

DHCP Server:

DHCP Lease Expiration:

BOOTP Broadcast:

Self Assigned Address State:

Self Assigned Address:

TCP/IPv6:

Link Local Address:

Use Router Supplied Prefix:

Stateless Global Address 1:

Stateless Global Address 2:

Manual Address:

DHCP Addressing:

DHCP Address:

Default Gateway:

DUID (DHCP Unique Identifier):

DNS Settings:

Requested Host Name:

Verified Host Name:

Requested Domain Name:

Verified Domain Name:

Multicast DNS:

Release DHCP Leases and DNS Registrati...

Primary DNS Server:

Prefer IPv6 DNS over IPv4:

Bonjour:

Bonjour Printer Name:

HTTP:

Force Traffic over Secure Connection (H...

IPP

SNMP

SNMP v1/v2:

SNMP v3:

LPR/LPD:

Raw IP Printing:

LDAP

LDAP Server 1 Primary LDAP Address:

LDAP Server 1 Search Directory Root:

LDAP Server 1 Secure Connection (LDA...

LDAP Server 1 Validate Server Certificate...

SMTP

SMTP Server:

Connect Encryption (TLS):

Validate Server Certificate (TLS):

SMTP Authentication Type:

Enabled

fe80::9e93:4eff:fea0:f5bd

Enabled

2403:0:22b:4:9e93:4eff:fea0:f5bd

::

Use DHCP as directed by a router

2403:0:22b:4:49a4:50c7:b761:9b44

fe80::4e42:1eff:fe9e:7967

000300019c934ea0f5bd

XRX9C934EA0F5BD

Enabled

Disabled

2403:0:22b:4:a14d:38b3:33b:477a

Enabled

Xerox AltaLink B8170 (A0:F5:BD)

Enabled

Yes

Enabled

Enabled

Disabled

Enabled

Enabled

0.0.0.0:389

Disabled

Disabled

10.61.10.8:25

No Encryption

Basic Auth with SMTP

## Protocols (cont.)

POP3	
POP3 Server:	0.0.0.0:110
POP3 Secure Connection (TLS):	Disabled
POP3 Validate Server Certificate:	
E-mail Address:	
FTP:	Enabled
FTP Client:	Enabled
FTP Client Mode:	Passive
Web Services on Device:	Enabled

## Apps

## Printing

Banner Sheet:	Disabled
Error Sheets:	Enabled
Paper Substitution:	Enabled
Tray Priority:	1,2,3,4,5
PostScript	Installed
Level:	3
Version:	3021.101
PCL	
Version:	6
Font Name:	Courier
Custom Color Tables	Enabled
Label:	Not Installed

Fax:	Enabled/Displayed
Fax Line1:	3338
Fax Line2:	

## Server Fax:

Repository Protocol:	SMB
Repository Server:	10.61.23.93:445
Repository Document Path:	/

## Workflow Scanning:

Email:	Enabled
--------	---------

## Scan to Mailbox:

Storage Capacity (MB):	23443 MB
Storage Used (MB):	1267 MB
Cleanup of Public Folders:	Enabled
Cleanup of Created Folders:	Enabled
Cleanup Time:	Daily

## Scan to Home:

Scan To:	Disabled
----------	----------

## Cloud Services:

Cloud Services:	Disabled
-----------------	----------

## Print From:

Saved Jobs for Reprint:	Enabled
Print From USB:	Enabled
Print From MailBox:	Disabled
Cloud Services:	Disabled

## Accounting

Accounting Mode:	None
Network Accounting:	Disabled

## Security

## Authentication Configuration

Machine UI Authentication:	Locally on the Device
Home:	Unlocked
Jobs:	Unlocked
Device:	Unlocked
Device Website Authentication:	Locally on the Device
Authorization:	Locally on the Device
Retrieve E-mail from LDAP:	Enabled

## Authentication Server:

Authentication Server:	Kerberos
------------------------	----------

## Xerox Secure Access:

Xerox Secure Access:	Disabled
----------------------	----------

## Audit Log:

Audit Log:	Enabled
------------	---------

## IP Sec:

IP Sec:	Disabled
---------	----------

## IP Filtering:

IP Filtering:	Disabled
---------------	----------

## Security Certificates

Machine Certificate:	Signed
Root Certificates Installed:	54

## 802.1x:

802.1x:	Disabled
---------	----------

## Image Overwrite

Immediate:	Installed/Enabled
Scheduled:	Disabled

## FIPS 140-3:

FIPS 140-3:	Disabled
-------------	----------

## TLS:

TLS:	TLS 1.2 and TLS 1.3
------	---------------------

## TLS Hash:

TLS Hash:	SHA-1, SHA-256 and above
-----------	--------------------------

## Trellix Embedded Control:

Trellix Embedded Control:	Enhanced Security
---------------------------	-------------------



Common User Data

Machine Name: Xerox AltaLink B8170 (A0:F5:8D)  
Machine Serial Number: HHZ762811  
Fax Line1: 3338  
Machine Activation Date: Sep 17, 2025 22:17:28  
Total Impressions: 663

Machine Profile

Xerox Asset Tag:  
Customer Asset Tag:  
Service Phone Number:  
Customer Support Number:  
Supplies Phone Number:  
Recycling Phone Number:  
System Administrator: Not set  
Machine Location: machine location not set

Managed By

Primary MB Server:

Machine Hardware

Fax Card: Embedded; 2 Lines  
Fax Memory Size: 966 MB  
Foreign Interface Card: not present  
Device RAM Size: 8192 MB  
Device Storage Size: used=3608MB/total=500107MB (HDD)  
EPC Memory Size: 512 MB  
Finisher Type: Offsetting Catch Tray  
Finisher Punch: None  
Finisher Folder: not present  
Multi-feed Detection Kit: Not Installed

General Setup

Remote Services: Enabled  
Remote Software Download: Enabled  
Remote Services Trans. Time: 00:47  
Xerox Workplace Cloud: Enabled  
E-mail Alerts: Disabled  
Service Plan: Metered  
Billing Impression Mode: A3 Impressions  
Geographic Region: unknown  
Startup Config Report: Enabled  
GMT Offset: +05:30  
Cloning Installation: Allowed (Encrypted Files Only)  
Allow Print Submission of Clone Files: Disabled  
File Sharing: Enabled  
JBT62: Lossless

Energy Save

Deep Sleep: Disabled  
Energy Saver Mode: Job Activated  
Sleep Mode Timer: 0 minutes  
Auto-Off: Disabled

Smart Proximity Sensor

Wake on Arrival: Enabled  
Sleep on Departure: Disabled  
Maximize Detection Range: Disabled

Software Versions

Device Software: 123.014.005.26700  
Patch Version: None  
Network Controller: 123.014.26700  
UI Panel Firmware: 003.005.00000  
User Interface: 123.014.26700  
Marking Engine: 064.023.000  
Copy Controller: 123.014.26700  
Document Feeder: 001.035.000  
Finisher: 000.000.000  
Fax: 003.022.004  
OS: 123.005.26600  
Scanner: 017.025.003  
Software Upgrade: 123.014.26700

Machine Upgrades:

Last Successful Upgrade: September 26, 2025 11:00:29  
Scheduled Auto Upgrades: Disabled  
Auto Upgrade Start Time: Daily  
Auto Upgrade Server: 0.0.0.0:21

Media Trays

Tray 1: Plain, White and A4 (210 x 297 mm)  
Tray 2: Plain, White and A4 (210 x 297 mm)  
Tray 3: Plain, White and A4 (210 x 297 mm)  
Tray 4: Plain, White and A4 (210 x 297 mm)  
Bypass Tray: Plain, White and A3 (297 x 420 mm)

Connectivity

Mobile Workflows

AirPrint Printing: Enabled  
Mopria Printing: Enabled  
AirPrint / Mopria Scanning: Enabled  
Authentication Required: Disabled  
Universal Print: Disabled  
Universal Print Registration Status: Not Registered

Physical Connections

USB Settings  
USB Type A Ports: All Enabled  
USB Type B Port: Disabled  
Wired: Enabled  
Ethernet MAC Address: 9c:93:4e:a0:f5:bd  
Ethernet Speed/Duplex Setting: auto  
Wireless: Disabled

Wireless:

Wireless MAC Address:

Network Name (SSID):

BSSID:

Security Mode:

Encryption Algorithm:

Status:

Wi-Fi Direct:

Wireless Hardware: Enabled

Wi-Fi Protected Setup™ (WPS) Name: Not Installed

Connection Method:

Subnet Prefix Address:

Access Point (SSID):

Show Password on Device Touch Screen:

NFC:

iBeacon (Bluetooth®) for AirPrint Di... Enabled

iBeacon Hardware: Enabled

Bluetooth Device Address: Not Installed

iBeacon IP Address:

Protocols

TCP/IPv4:

IPv4 Address: Disabled

Subnet Mask:

Router/Gateway:

Automatic Addressing:

DHCP Server:

DHCP Lease Expiration:

BOOTP Broadcast:

Self Assigned Address State:

Self Assigned Address:

TCP/IPv6:

Link Local Address: Enabled

Use Router Supplied Prefix: fe80::9e93:4eff:fea0:f5bd

Stateless Global Address 1: Enabled

Stateless Global Address 2: 2403:0:22b:4:9e93:4eff:fea0:f5bd

Manual Address: ::

DHCP Addressing:

DHCP Address: Use DHCP as directed by a router

Default Gateway: 2403:0:22b:4:49a4:50c7:b761:9b44

DUID (DHCP Unique Identifier): fe80::4e42:1eff:fe9e:7967

000300019c934ea0f5bd

DNS Settings:

Requested Host Name: XRX9C934EA0F5BD

Verified Host Name:

Requested Domain Name:

Verified Domain Name:

Multicast DNS: Enabled

Release DHCP Leases and DNS Registrati... Disabled

Primary DNS Server: 2403:0:22b:4:a14d:38b3:33b1:477a

Alternate DNS Server 1: 2403:0:22b:4:39f0:35cd:e8a8:3087

Alternate DNS Server 2: ::

DNS Connection Timeout: 5

Append Device Domain: Enabled

Append Parent Domains: Disabled

DNS Domain Search List:

Prefer IPv6 DNS over IPv4: Enabled

Installed Options

PS: Installed

## Protocols (cont.)

## Bonjour:

Bonjour Printer Name:	Xerox AltaLink B8170 (A0:F5:BD)
HTTP:	Enabled
Port Number:	80
Force Traffic over Secure Connection (H...):	Yes
Secure HTTP Port Number:	443
Proxy Server:	Automatic
Proxy Server Address:	0.0.0.0:8080
IPP:	Enabled
Secure IPP Mode:	IPP and Secure IPPS
IPP Network Path:	http://:631

## SNMP

SNMP v1/v2:	Enabled
SNMP v3:	Disabled

## IPR/LPD:

Port Number:	515
PDL Switching:	Disabled
PDL Banner Override:	Disabled

## Raw IP Printing:

Port Number 1:	9100
Bidirectional:	Disabled
End of Job Timeout:	300
PDL Switching:	Disabled

## LDAP

LDAP Server 1 Friendly Name:	
LDAP Server 1 Primary LDAP Address:	0.0.0.0:389
LDAP Server 1 Alternate LDAP Address:	0.0.0.0:389
LDAP Server 1 Search Directory Root:	
LDAP Server 1 Secure Connection (LDA...):	Disabled
LDAP Server 1 Validate Server Certificate:	Disabled

## SMTP

SMTP Server:	10.61.10.8:25
Connect Encryption (TLS):	No Encryption
Validate Server Certificate (TLS):	
Max Message Size (KB):	10240
Number of Fragments:	1
Total Job Size (KB):	300000
Job Splitting Boundary:	Page Boundary
Credentials for Auto E-mails:	None
Credentials for Walkup User:	None
SMTP Authentication Type:	Basic Auth with SMTP

## POP3

POP3 Server:	0.0.0.0:110
POP3 Secure Connection (TLS):	Disabled
E-mail Address:	
POP3 Validate Server Certificate:	
Receipt of E-mail via POP3:	Disabled
Send Confirm on Request:	Enabled
Incoming E-mail cover sheet:	Enabled

## MTP:

Primary Server:	[2403:0:22b:4:a14d:38b3:33b:477a]:123
Alternate Server:	[2403:0:22b:4:39f0:35cd:e8a8:3087]:123

## SLP:

FTP Client:	Disabled
FTP Client Mode:	Enabled

## Web Services on Device:

WS-Discovery:	Enabled
WS-Discovery Multicast:	Enabled
WS-Print:	Enabled
WS-Scan:	Enabled

## Web Services

Copy Submission:	Enabled
Digital Certificate Management and Securi...	Enabled
Extensible Service Registration:	Enabled
Job Limits:	Enabled
Job Management Extension:	Enabled
Device Configuration:	Enabled
Scan Submission:	Enabled
Scan Workflow Management:	Enabled
Session Data:	Enabled
User Interface Configuration:	Enabled
EIP Proxy Configuration:	Enabled
Xerox Secure Access:	Disabled
EIP SNMP Configuration:	Enabled
Print Submission:	Enabled
Scan Template Mgmt:	Enabled
Mass Storage Access:	Enabled
Card Reader Access:	Enabled
Authentication & Accounting Configur...	Enabled
Export Audit Log:	Enabled
Trellix Embedded Control:	Enabled

## Apps

## Printing

Banner Sheet:	Disabled
Sys/Start Job:	Disabled
Delete Held Jobs After:	3 Day(s) 0 Hour(s) 0 Minute(s)
Error Sheets:	Enabled
Paper Substitution:	Enabled
Tray Priority:	1,2,3,4,5
Default Copies:	1
Default Job Type:	Normal Print
Default Paper Size:	x=210mm, y=297mm
Default Paper Color:	White
Default 2 Sided Printing:	2 Sided
Default Output Tray:	Output Catch Tray
Default Output Color:	Black & White
Default Collated Sets:	Enabled
Default Stapling:	Not Available
Offsetting Between Jobs:	Offset Between Jobs
PostScript	Installed
Level:	3
Version:	3021.101
Image Quality:	Standard

## PCL

Version:	6
Pitch Size:	10.00
Point Size:	12.00
Font Name:	Courier
Lines Per Page:	64

## Custom Color Tables

Label:	Enabled
	Not Installed
Fax:	Enabled/Displayed
Fax Line1:	3338
Fax Line2:	

## Server Fax:

Confirmation Sheet:	Enabled
Delay Start:	Errors Only
Repository Protocol:	Disabled
Repository Server:	SMB
Repository Document Path:	10.61.23.93:445
	/

## Workflow Scanning:

Confirmation Sheet:	Enabled
Default Repository Protocol:	Errors Only
Default Repository Server:	SMB
Default Repository Document Path:	10.61.23.93:445
	/
Default Repository Login Credentials:	Device
Alt1 Repository Protocol:	SMB
Alt1 Repository Server:	0.0.0.0
Alt1 Repository Document Path:	
Alt1 Repository Login Credentials:	Device
Workflow Pool Protocol:	SMB
Workflow Pool Server:	0.0.0.0
Workflow Pool Path:	

## Email:

Default From Address:	Enabled
Confirmation Sheet:	syed.habibunnisa@xeroxqa.com
Auto Send to Self:	Errors Only
E-mail Security:	Disabled

## Scan to Mailbox:

View Mailboxes by Default:	Disabled
Storage Capacity (MB):	Enabled
Storage Used (MB):	23443 MB
Cleanup of Public Folders:	1267 MB
Cleanup of Created Folders:	Enabled
Cleanup Time:	Enabled
	Daily

## Scan to Home:

Friendly Name:	Disabled
Workflow Name:	Disabled
Auto Create Subdir:	Disabled
Append User Name to Path:	Disabled
Auto Create User Name Dir:	Disabled

## Scan To:

Cloud Services:	Enabled
	Disabled
Print From:	Enabled
Saved Jobs for Reprint:	Enabled
Print From USB:	Enabled
Print From MailBox:	Disabled
Cloud Services:	Disabled

Accounting

Accounting Mode: None  
Network Accounting: Disabled

Security

Authentication Configuration

Machine UI Authentication: Locally on the Device  
Home: Unlocked  
Jobs: Unlocked  
Device: Unlocked  
Device Website Authentication: Locally on the Device  
Authorization: Locally on the Device  
Retrieve E-mail from LDAP: Enabled  
Authentication Server: Kerberos

Kerberos Primary Realm:  
Kerberos Primary Address: 0.0.0.0:88  
Kerberos Alt 1 Realm:  
Kerberos Alt 1 Address: 0.0.0.0:88  
SMB NT Domain:  
SMB Alt 1 NT Domain:  
Smartcard Ctrl Server: 0.0.0.0:443  
Smartcard Ctrl Domain:  
SmartCard OCSP URL:  
Card Reader Upgrade Policy: Enabled  
Card Reader Firmware Version:

Xerox Secure Access: Disabled  
Secure Access Server: 0.0.0.0:443  
Secure Access Path:

Audit Log: Enabled  
IP Sec: Disabled  
IP Filtering: Disabled

Security Certificates

Machine Certificate: Signed  
Root Certificates Installed: 54  
802.1x: Disabled

Image Overwrite

Immediate: Installed/Enabled  
Scheduled: Disabled  
Scheduled Frequency:

FIPS 140-3: Disabled  
TLS: TLS 1.2 and TLS 1.3  
TLS Hash: SHA-1, SHA-256 and above  
Trellix Embedded Control: Enhanced Security

Extensible Service Setup

Third Generation Browser: X3G\_3.24.23\_2.40.5\_011\_01.00.00  
Widget Version: v1.3.17 c8 20140613  
Widget Version: v2.5.04 g9 20240123

